

品舰系列

磁吸组合照明系统



Spotlight
Grille lamp
Floodlights

品舰系列磁吸组合轨道



KLM-GD11348A/L1000



KLM-GD9962A/L1000

品舰系列磁吸组合灯具

射灯



KLM-SD45100P/10W



KLM-SD45140P/15W



KLM-SD65125P/15W



KLM-SD65140P/20W



KLM-SD75145P/25W

格栅线性灯



KLM-GSD3450P/L162/12W



KLM-GSD3450P/L322/24W


平面线性灯



KLM-PMD3450P/L178/8W



KLM-PMD3450P/L342/16W

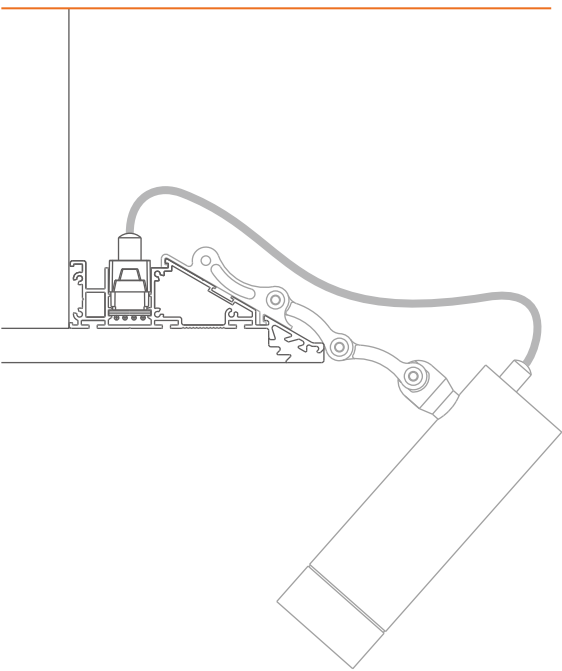

餐饮空间 & 酒店大堂



Gypsum
track

品舰系列暗藏式石膏轨道

产品型号: KLM-GD11348A/L1000

安装方式: 暗藏式

产品尺寸: W113*H48mm

标准规格: L1000/1500/2000mm

控制方式: 多组控制

材 质: 6063铝


外观颜色: 砂黑色/砂白色

防护等级: IP20


天花厚度: 15mm

适合批灰前安装

截面尺寸

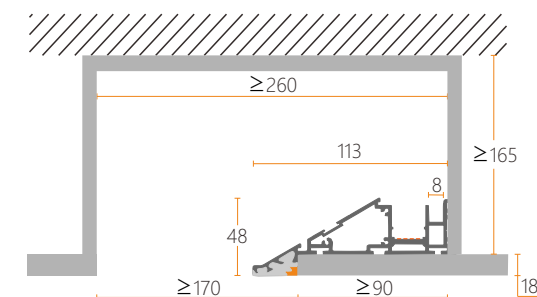

发光效果

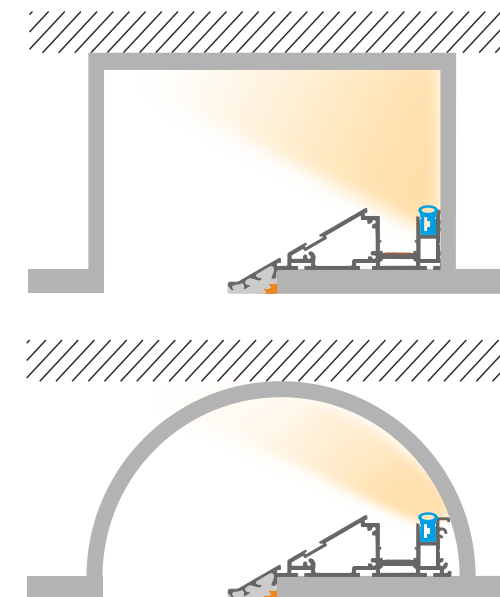


射灯




格栅线性灯




平面线性灯




连接件




搭桥



堵头



拱形外壳



方形外壳



宽8mm 硅胶氛围灯

适用配件




normal
track


品舰系列暗藏式轨道

产品型号: KLM-GD9962A/L1000
安装方式: 暗藏式
产品尺寸: W99*H62mm
标准规格: L1000/1500/2000mm
控制方式: 多组控制
材 质: 6063铝
外观颜色: 砂黑色/砂白色
防护等级: IP20
天花厚度: 15mm
适合批灰后安装

截面尺寸

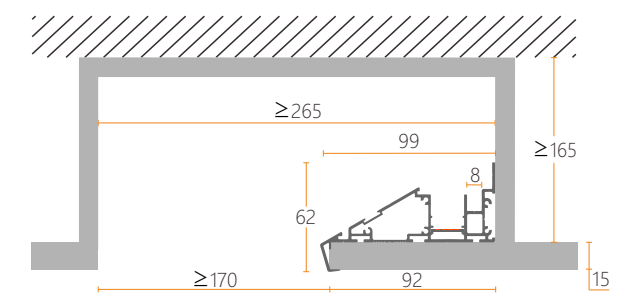

发光效果

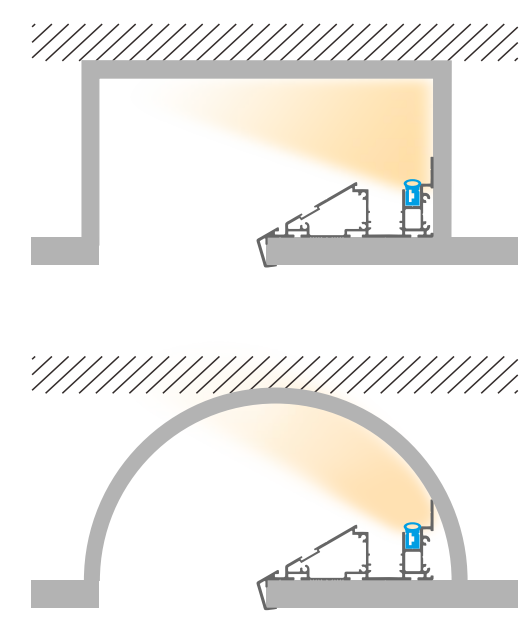



射灯



格栅线性灯




平面线性灯


更多产品研发中……



连接件




搭桥



堵头





拱形外壳




方形外壳



宽8mm 硅胶氛围灯

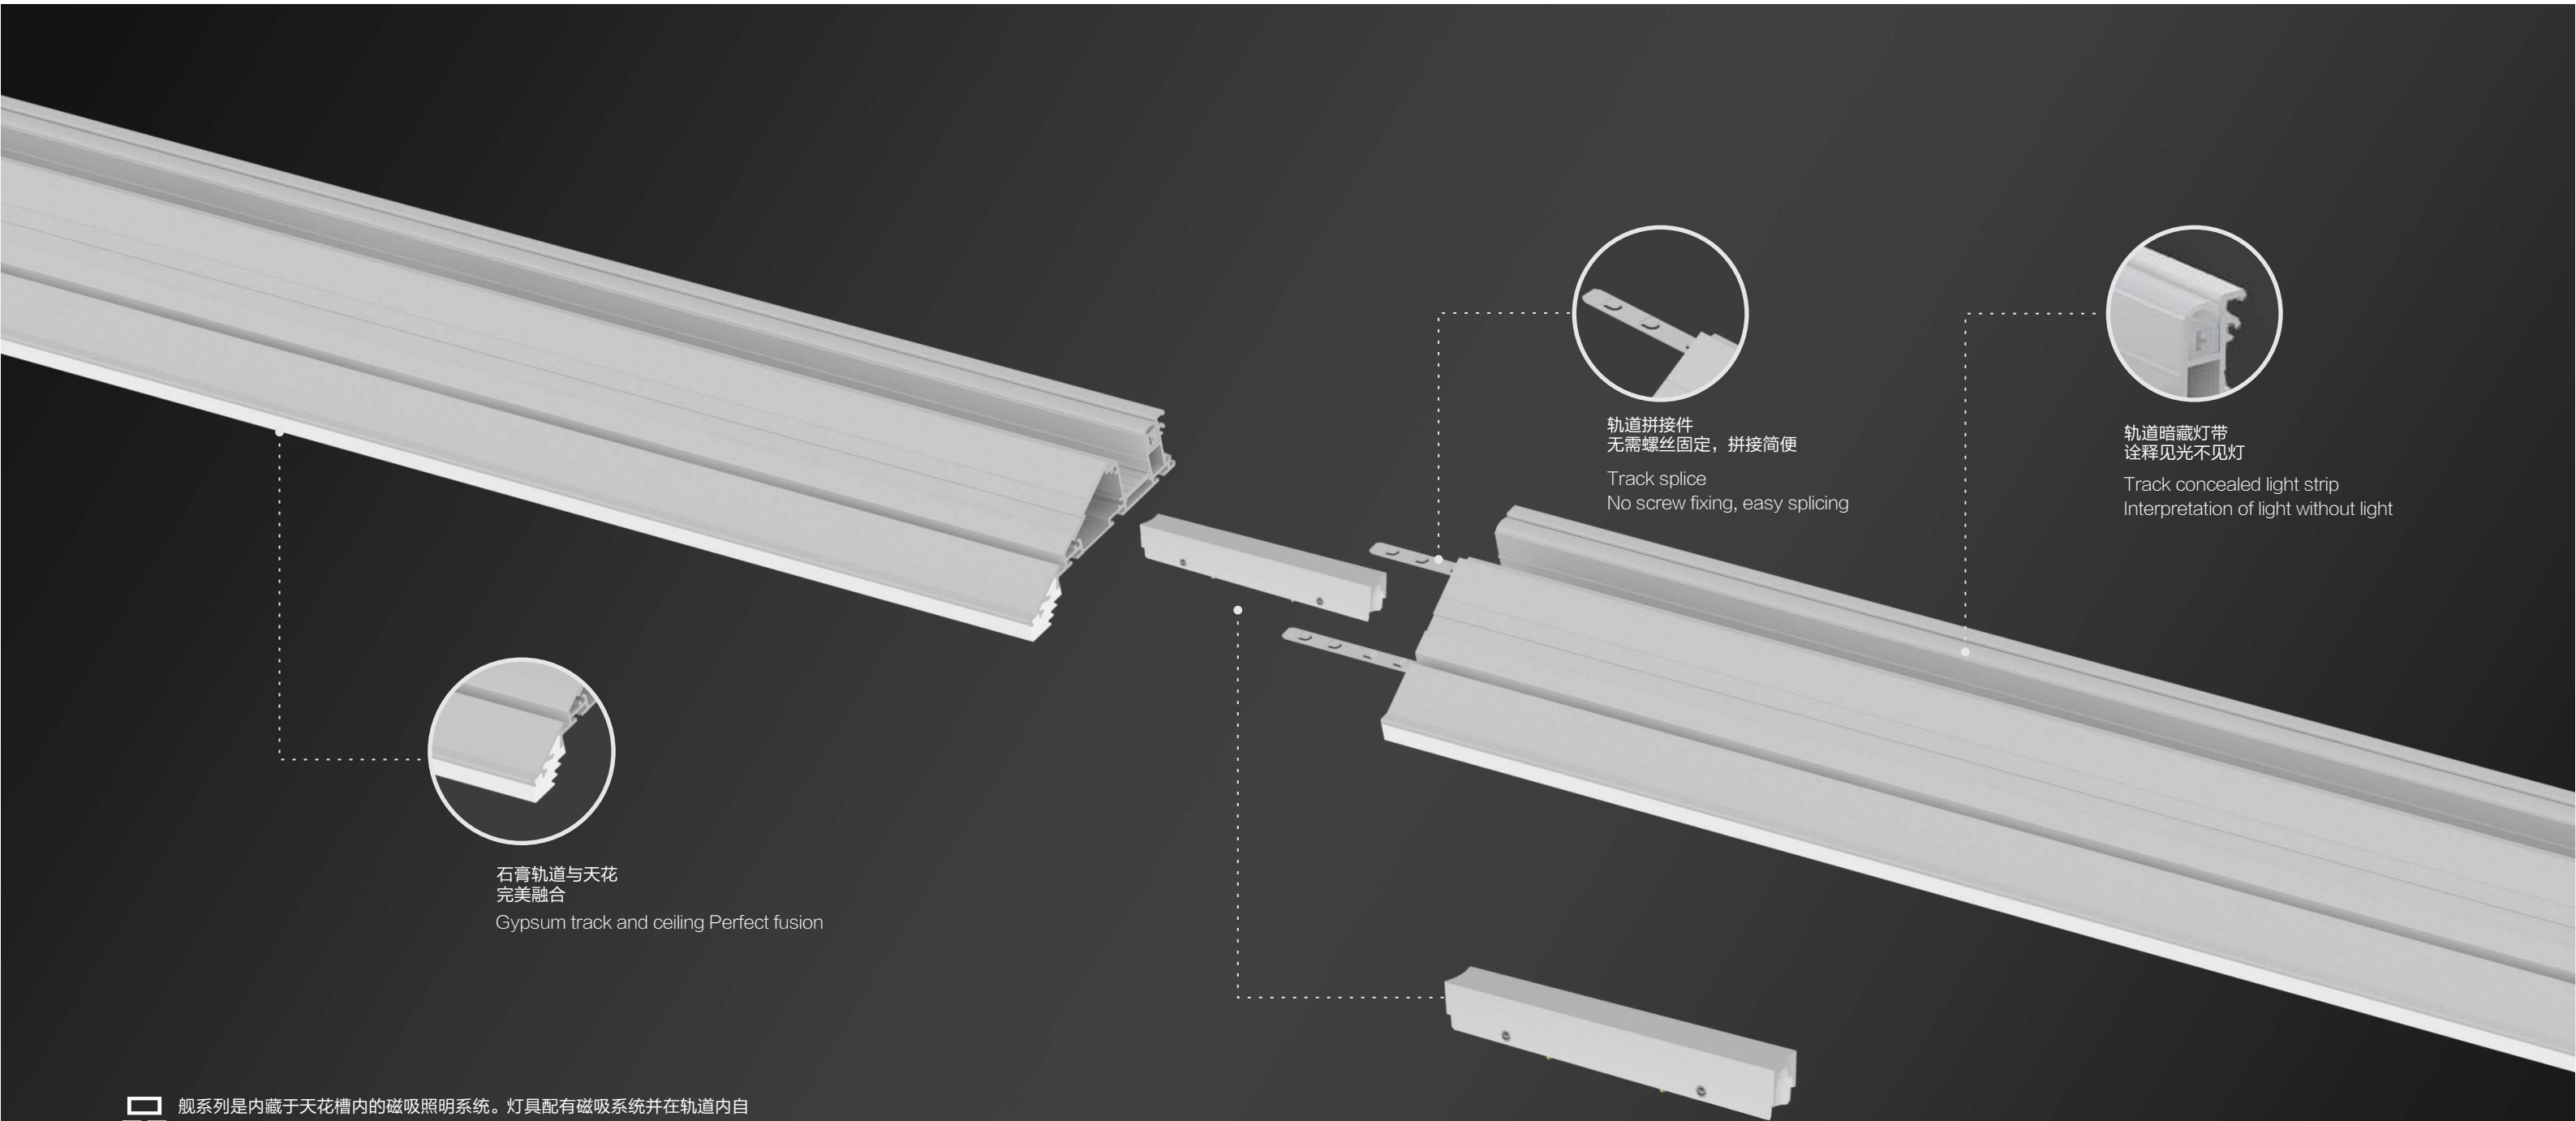

石膏轨道与天花
完美融合
Gypsum track and ceiling Perfect fusion



轨道拼接件
无需螺丝固定，拼接简便
Track splice
No screw fixing, easy splicing



轨道暗藏灯带
诠释见光不见灯
Track concealed light strip
Interpretation of light without light

舰系列是内藏于天花槽内的磁吸照明系统。灯具配有磁吸系统并在轨道内自由放置，随意调节角度，全方位都可以照射到。此外，灯带暗藏在轨道中起间接照明在天花上附加氛围灯光效果。

The inset series are products where the magnetic attraction system attaches directly to the original ceiling, flush with the ceiling. The spotlights are equipped with magnetic systems and are placed freely in the track to adjust the light angle at will. In addition, light strips are hidden in the track to provide indirect lighting and additional lighting effects in the ceiling.

搭桥作用：
轨道与轨道电路连接时使用，根据拼接情况选购。

Bridging effect:
When the track is connected with the track circuit,
Choose according to the splicing.



灯具随意调角，能照射到每一个角落。



△外壳客户可自制或选购



△外壳客户可自制或选购




两种轨道不同的安装，第一种：暗藏式石膏轨道适用于批灰前安装，安装完成后完全隐藏轨道，轨道上的石膏与批灰层完美接合很好的防止批灰掉落/破裂；第二种：暗藏式轨道适用于不做批灰天花饰面板或者已经批灰后的天花板安装；两种轨道能满足不同场所的安装需求。

The two kinds of rails are installed differently. The first one: the concealed gypsum rail is suitable for installation before Ash batching. After installation, the rail is completely hidden. The gypsum on the rail is perfectly connected with the ash batching layer to prevent the ash batching from falling / cracking; The second type: concealed track is applicable to ceiling installation without plastering or after plastering; The two tracks can meet the installation requirements of different places.

单轨道半圆形安装




单轨道方形安装

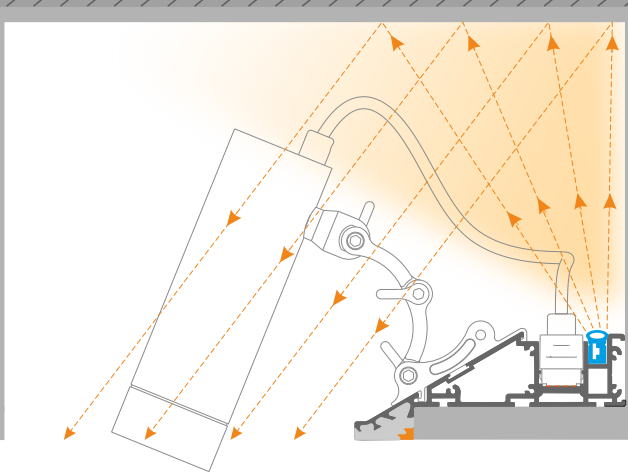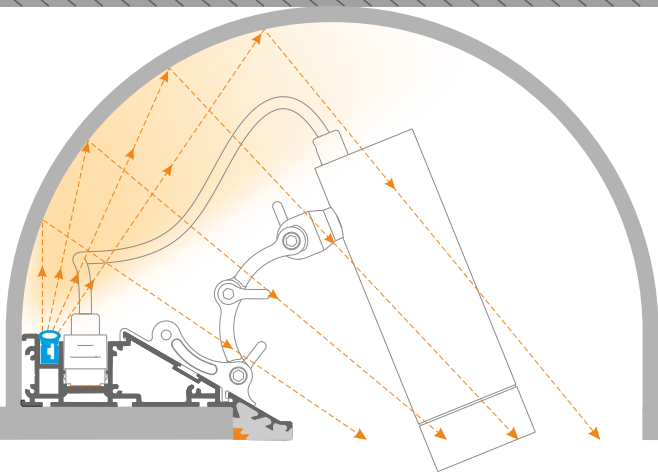
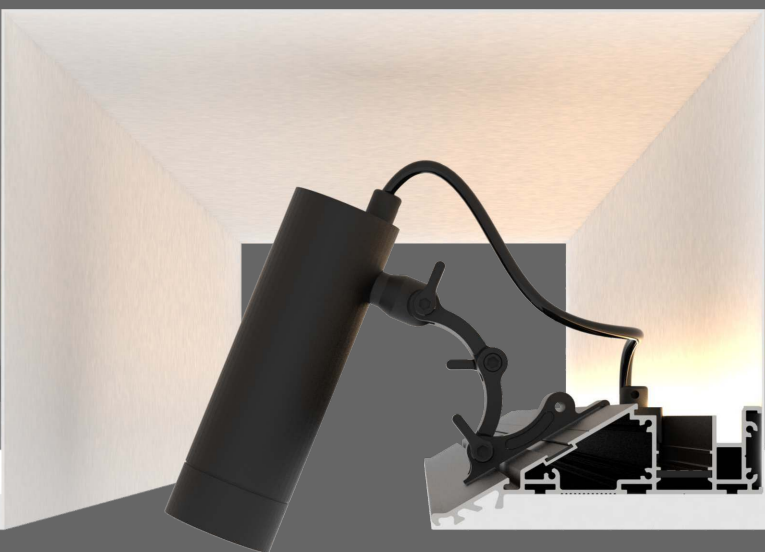


单轨道两种安装（拱形或方形）用于天花板开口；客户可自制或选购。品舰系列磁吸照明系统，轨道暗藏灯带营造氛围（间接照明）；灯具外观简洁、大方；配备多种光学配件组装，30° 大防眩角无漏光结构设计，有效避免杂散光；高光效COB光源配备高效率透镜，实现窄,中,宽多种光效。适用于酒店、专卖店、博物馆等。

Two mounting enclosures (arch or square) for ceiling openings; The shell can be made or purchased by customers. Pinjian series magnetic absorption lighting system, track hidden light belt to create an atmosphere (indirect lighting); The appearance of lamps and lanterns is simple and generous; Equipped with a variety of optical accessories, 30 ° large anti glare angle without light leakage structural design,Effectively avoid stray light; High luminous efficiency cob light source is equipped with high-efficiency lens to achieve narrow,medium and wide light effects. Suitable for hotels, shops, museums, etc.

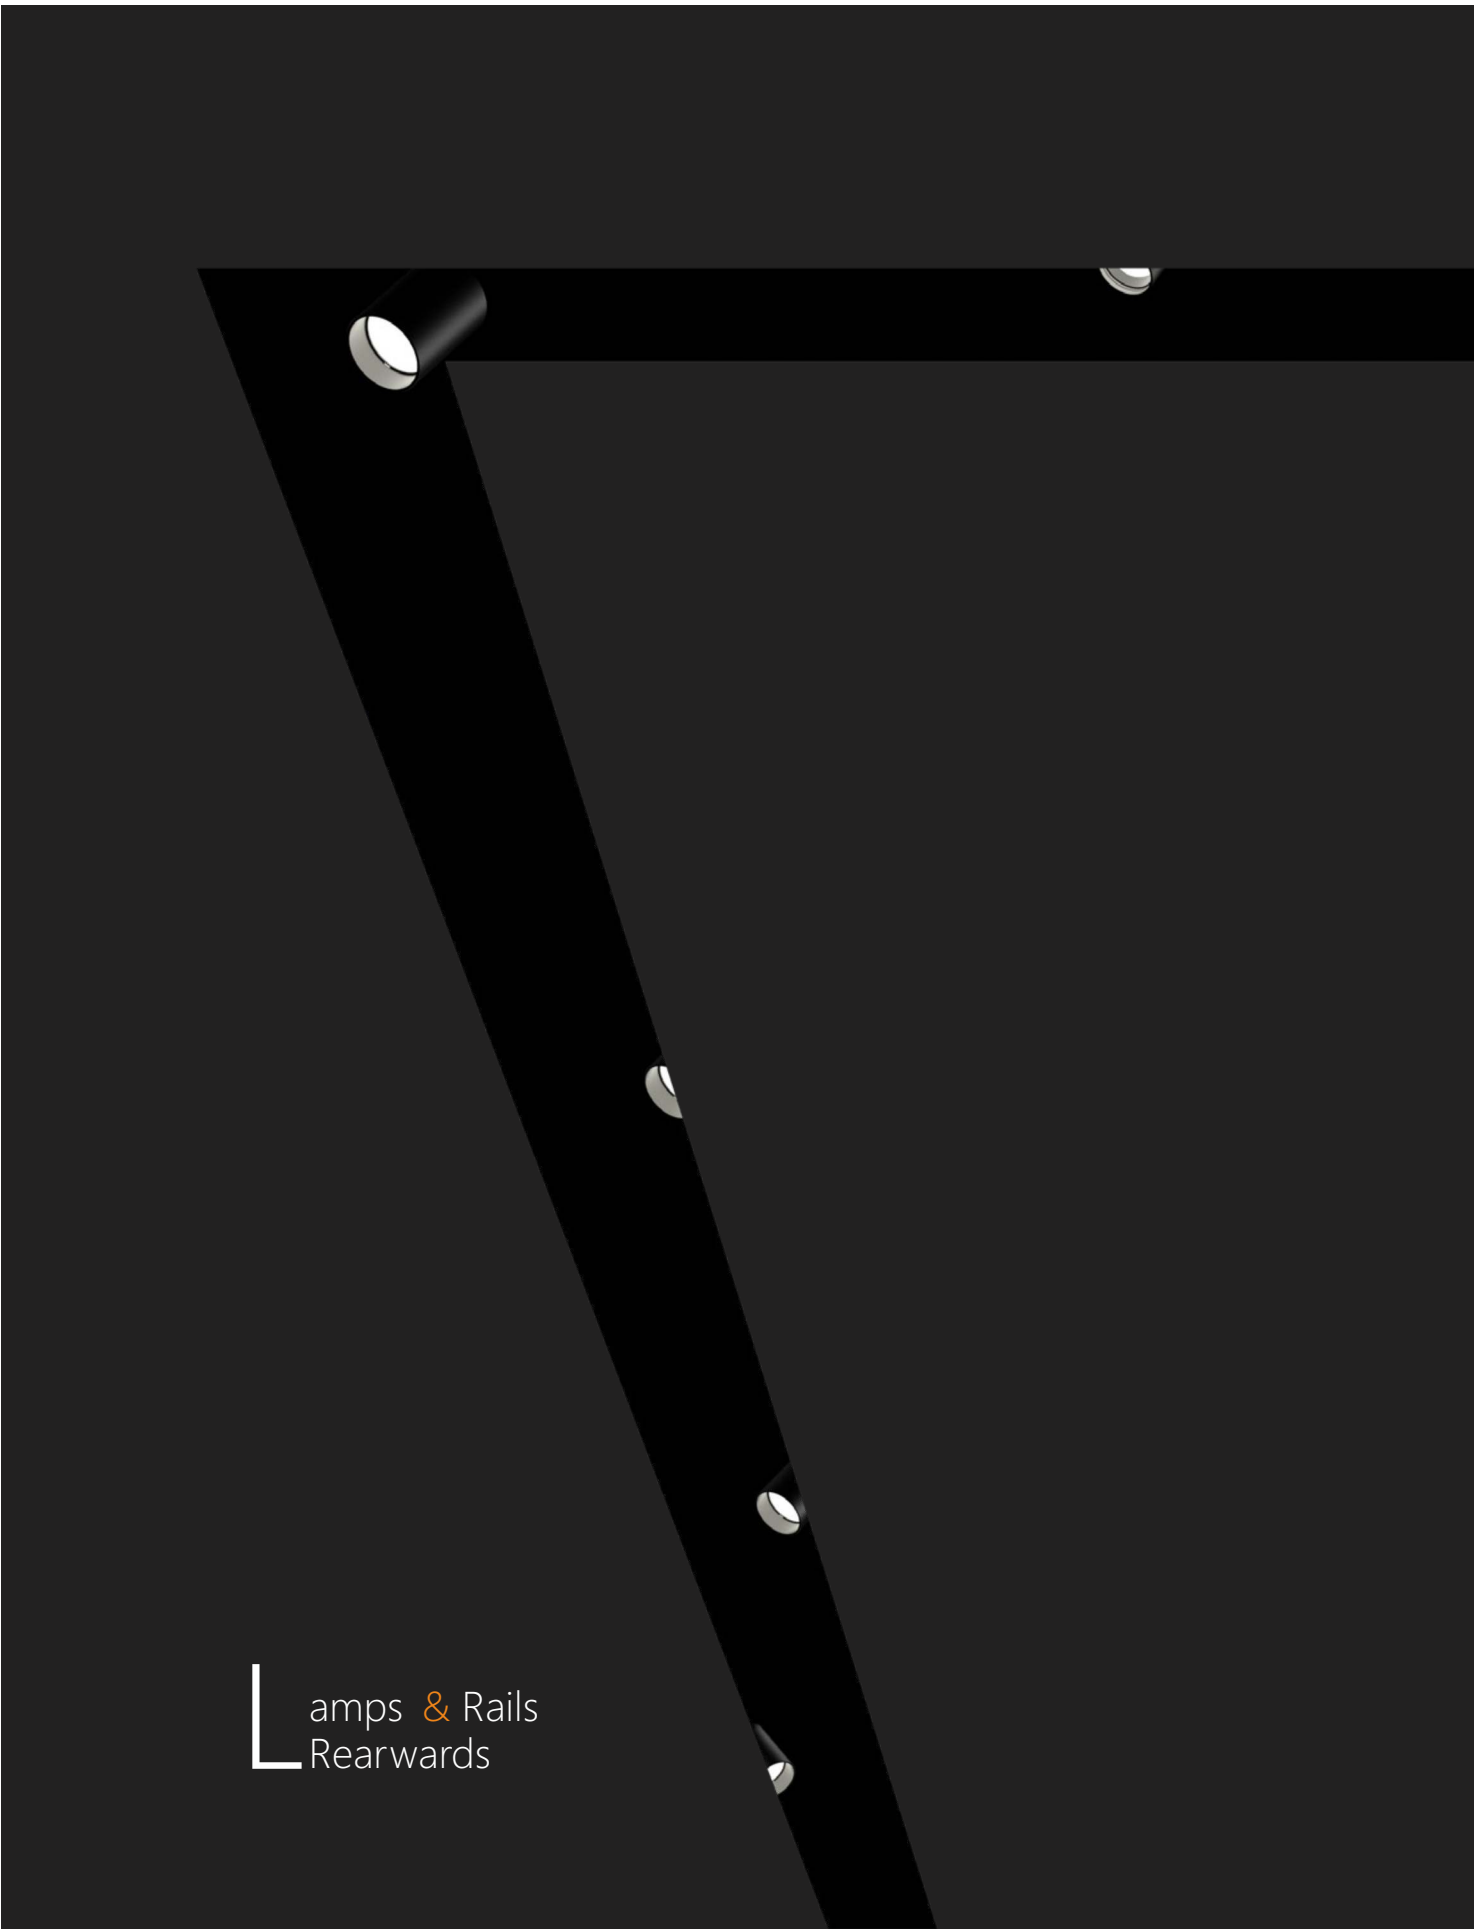



Lamps & Rails
Rearwards

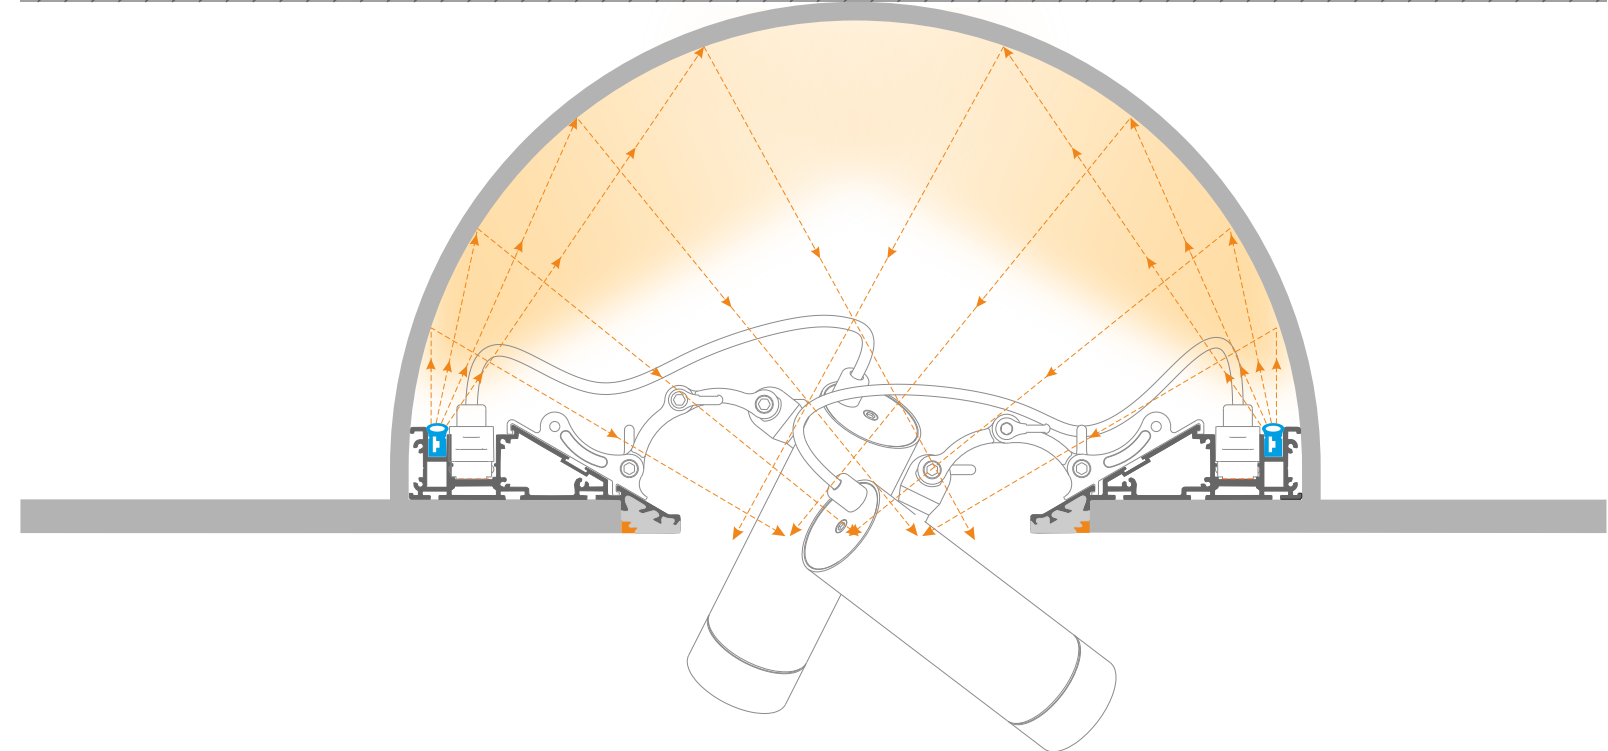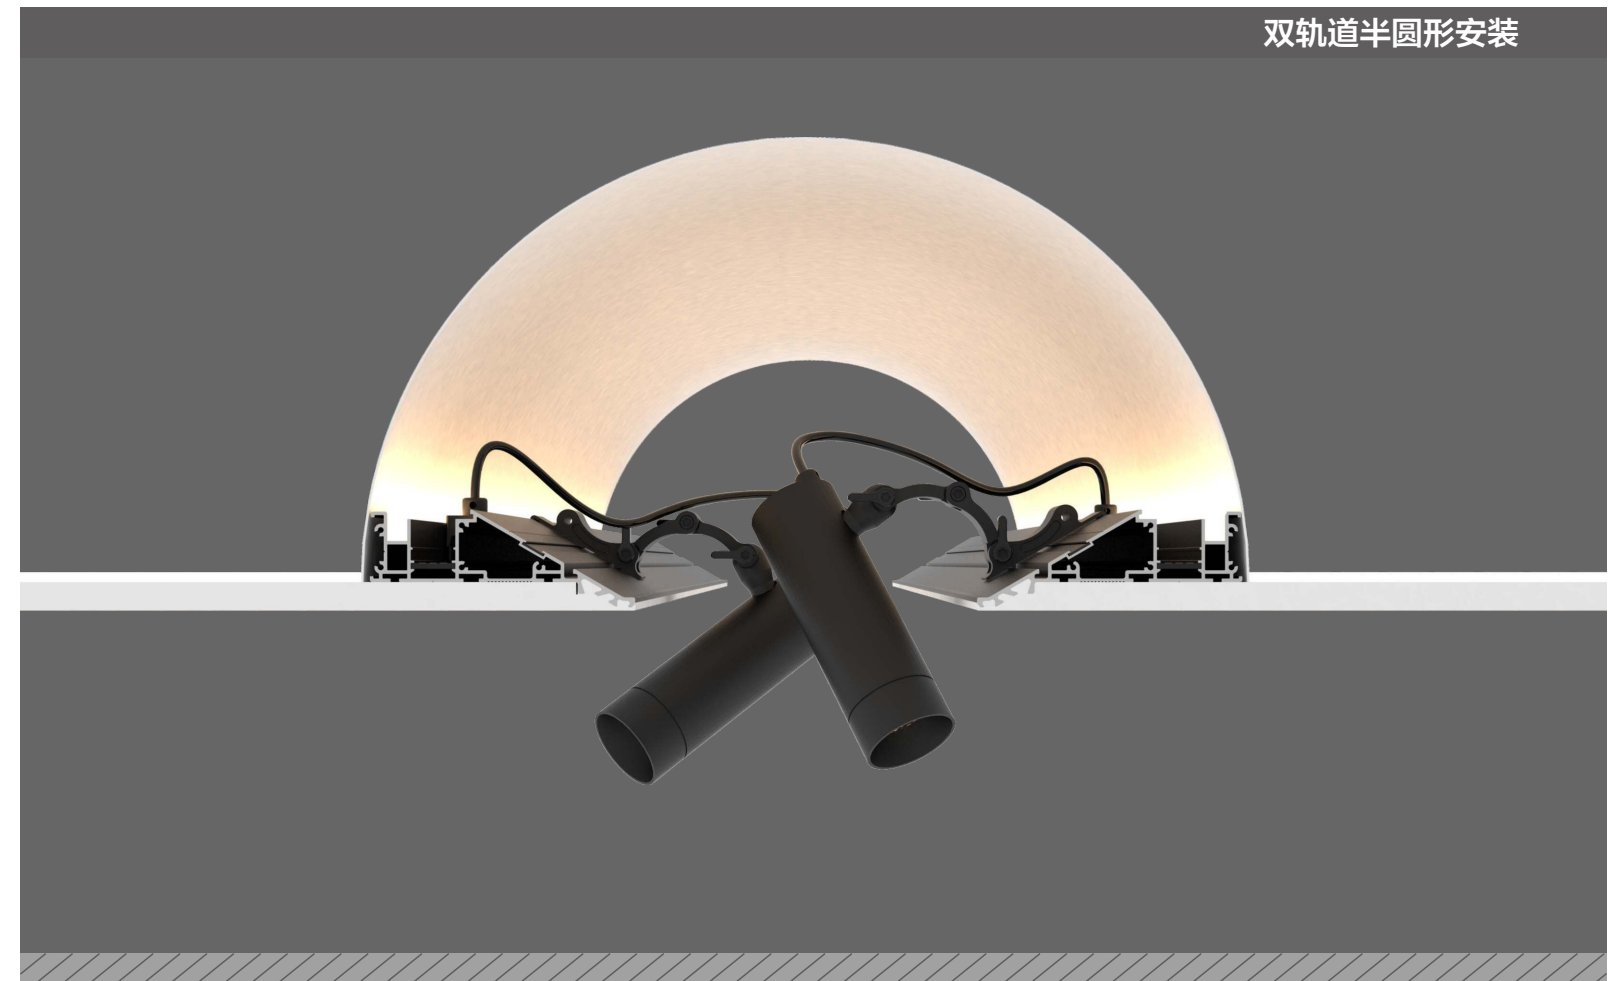

双轨道方形安装




双轨道圆角形安装

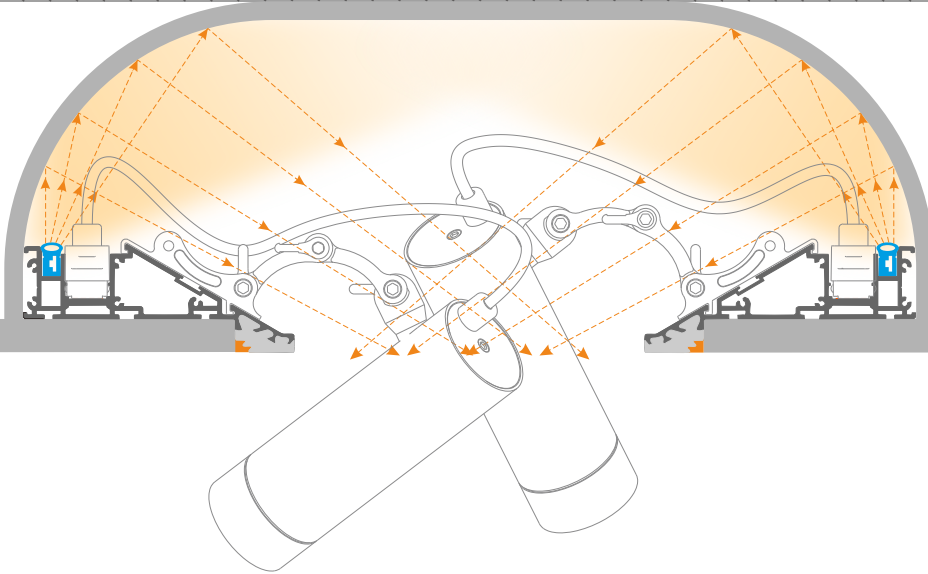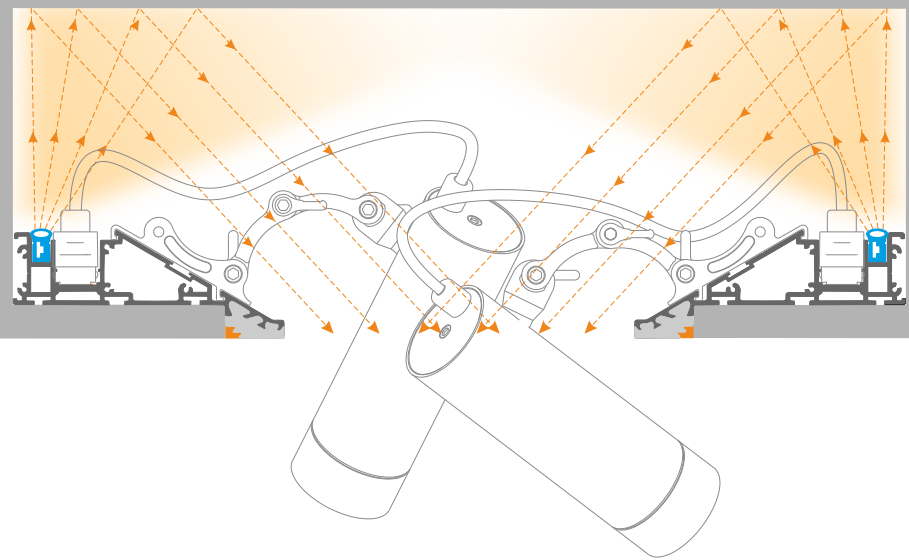


满足基本安装空间的情况下可任意设计轨道槽沙发造型，毫无局限性，能很好的满足设计师的要求，双轨道还能很好的控制灯具对照射物的不同角度照射的同时还能使灯具不外露，做到见光不见灯。


Under the condition of meeting the basic installation space, the shape of the track slot sofa can be designed arbitrarily, without any limitations, which can well meet the requirements of the designer. The double track can also well control the illumination of the lamps against the different angles of the objects, and at the same time, the lamps can not be exposed, so that the lamps can not be seen.

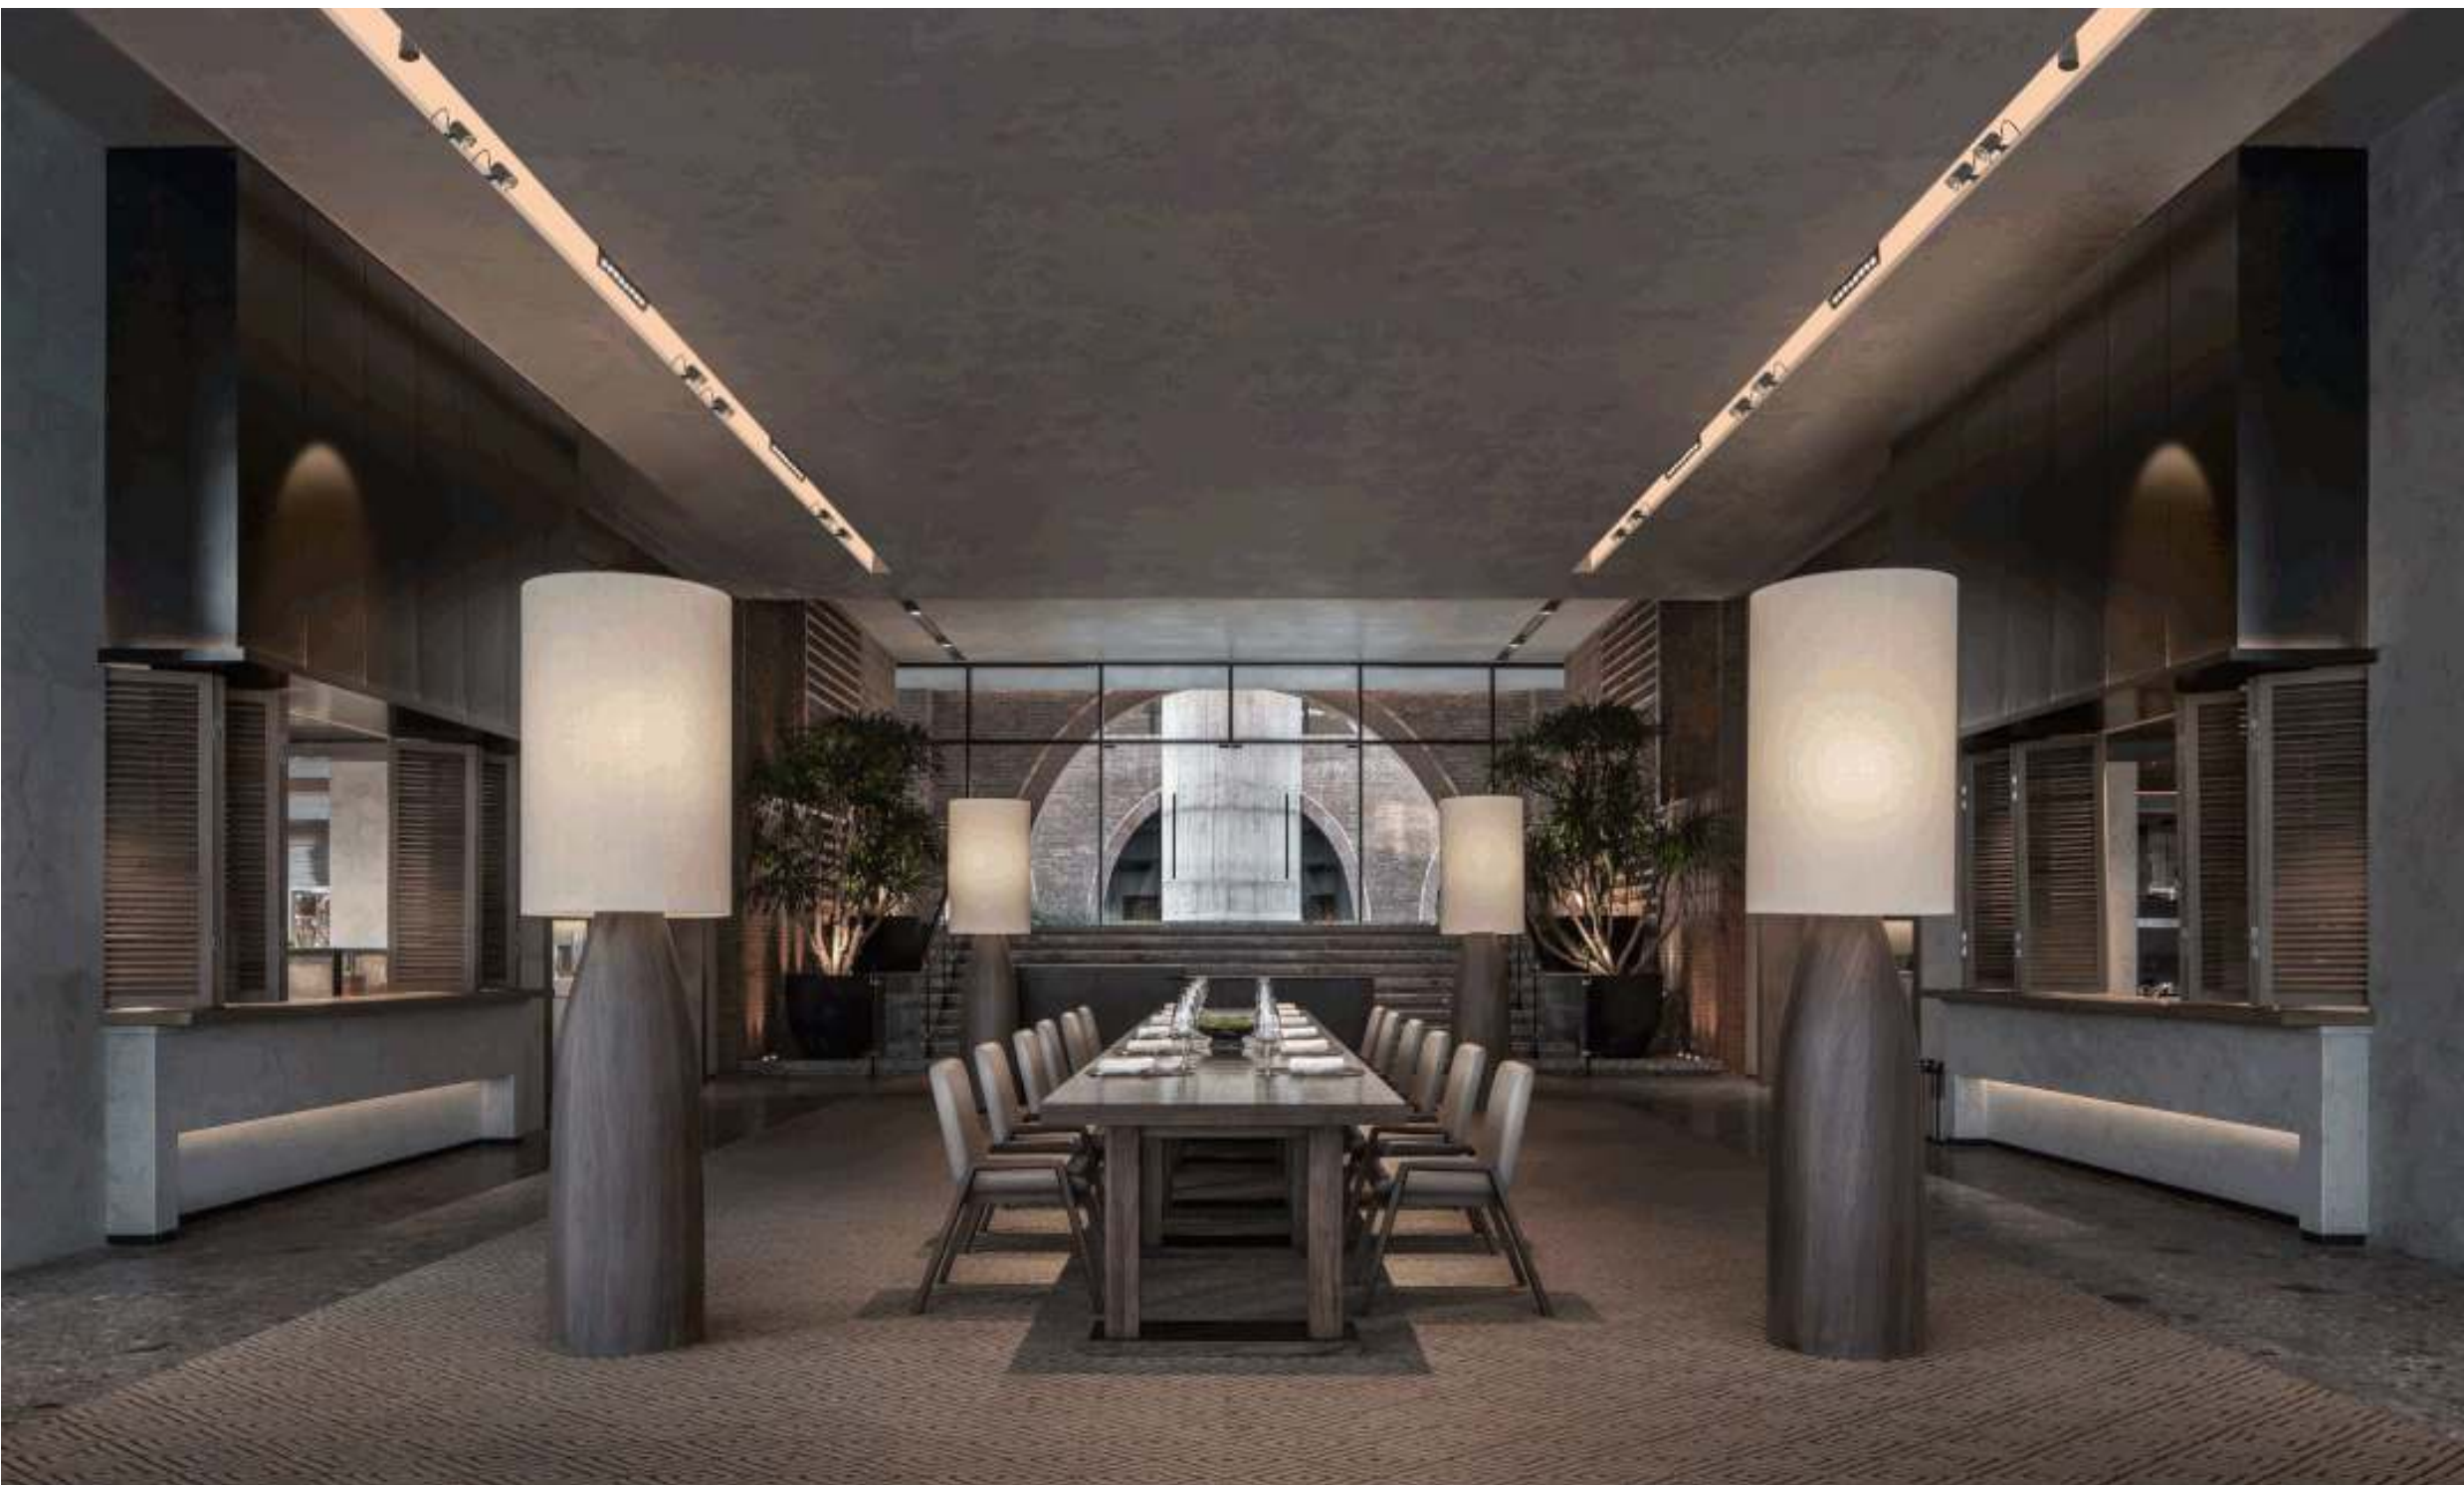

点、线、面光源，丰富的灯具搭配，很好得营造出您所需的照明氛围，使空间富有层次感；这是无主灯主义的另一代表作，完全隐藏轨道，可以做到见光而不见灯，让人想不到的出光方式。

Point, line and area light sources, rich lamp collocation, well create the lighting atmosphere you need, and make the space full of layers; This is another representative work of ownerless lightism. It completely hides the track and can see light without seeing the light. It is an unexpected way to emit light.

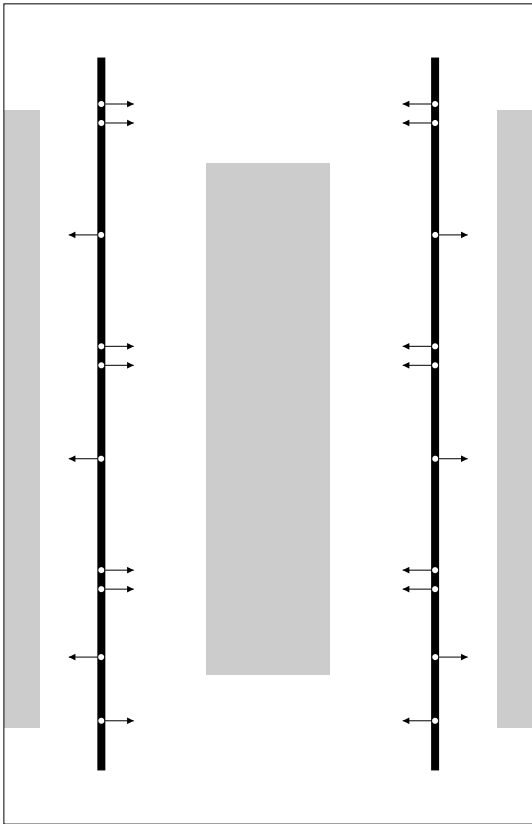

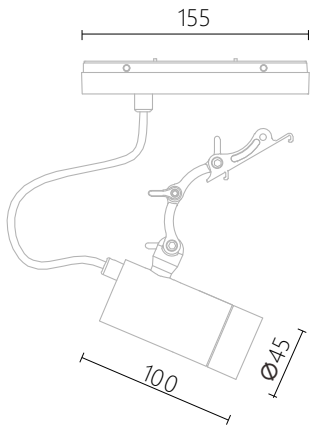

可调光



安装方便



高显指



无频闪



高效节能



名师设计




环保材料

光学参数

光束角	15°	24°	38°
光通量	563.5lm	494.4 lm	339.7lm

照度 距离 关系	15°			24°			38°		
	h(m)	E0 ¹ (lx)	φ(m)	h(m)	E0 ¹ (lx)	φ(m)	h(m)	E0 ¹ (lx)	φ(m)
	1.50	1327.53	0.57	1.50	968.11	0.61	1.50	259.43	1.12
	2.25	590.01	0.86	2.25	430.27	0.92	2.25	115.3	1.68
	3.50	243.83	1.34	3.50	177.82	1.43	3.50	47.65	2.62
	4.00	186.68	1.53	4.00	136.14	1.63	4.00	36.48	2.99

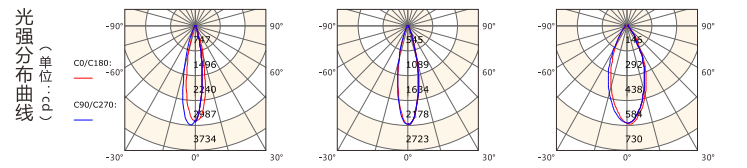

品舰系列射灯

产品型号: KLM-SD45100P/10W

产品尺寸: Ø45*100mm

材质: 6063铝

外观颜色: 砂黑色/砂白色

防护等级: IP20

调光: 支持

光源: Honourtek/Luminus

电压: DC24V/DC48V

功率: 10W

色温: 2700K/3000K/4000K

CRI: ≥90

光束角: 15° /24° /38°

色温对比图例




2700K



3000K




4000K

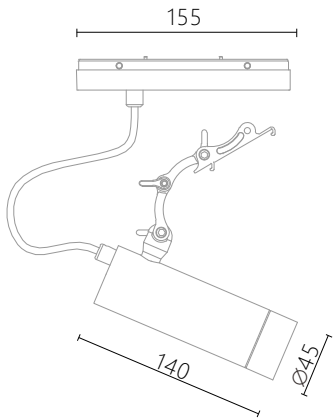


光学参数

光束角	15°	24°	38°						
光通量	618.8 lm	586.6 lm	388.6lm						
照度 距离关系									
	h(m)	E0°(lx)	ø(m)	h(m)	E0°(lx)	ø(m)	h(m)	E0°(lx)	ø(m)
	1.50	1539.14	0.51	1.50	1206.77	0.58	1.50	301.33	1.20
	2.25	684.06	0.76	2.25	536.34	0.87	2.25	133.92	1.79
	3.50	282.70	1.18	3.50	221.65	1.36	3.50	55.35	2.79
	4.00	216.44	1.35	4.00	169.70	1.55	4.00	42.37	3.149

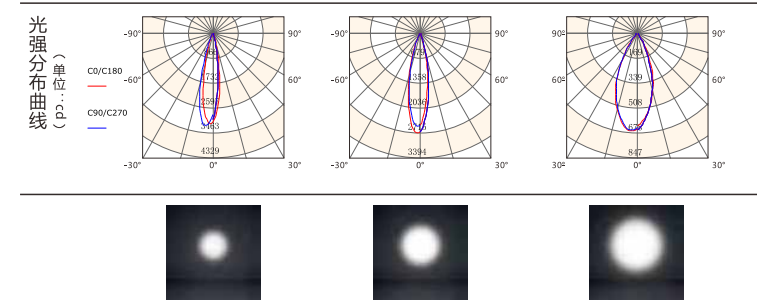


品舰系列射灯

产品型号: KLM-SD45140P/15W
产品尺寸: Ø45*140mm
材 质: 6063铝
外观颜色: 砂黑色/砂白色
防护等级: IP20
调 光: 支持
光 源: Honourtek/Luminus
电 压: DC24V/DC48V
功 率: 15W
色 温: 2700K/3000K/4000K
CRI : ≥90
光 束 角: 15° /24° /38°

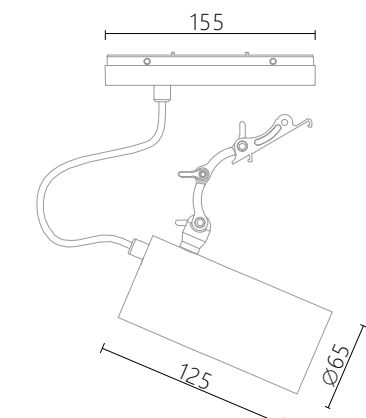

光学参数


光束角	15°	24°	38°																																													
光通量	776.0lm	534.7 lm	683.5lm																																													
照 度 距 离 关 系																																																
	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>3327.12</td><td>0.41</td></tr><tr><td>2.25</td><td>1478.72</td><td>0.61</td></tr><tr><td>3.50</td><td>611.10</td><td>0.95</td></tr><tr><td>4.00</td><td>467.88</td><td>1.09</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	3327.12	0.41	2.25	1478.72	0.61	3.50	611.10	0.95	4.00	467.88	1.09	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>2444.55</td><td>0.30</td></tr><tr><td>2.25</td><td>1086.47</td><td>0.45</td></tr><tr><td>3.50</td><td>449.00</td><td>0.70</td></tr><tr><td>4.00</td><td>343.76</td><td>0.80</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	2444.55	0.30	2.25	1086.47	0.45	3.50	449.00	0.70	4.00	343.76	0.80	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1288.01</td><td>0.62</td></tr><tr><td>2.25</td><td>572.45</td><td>0.93</td></tr><tr><td>3.50</td><td>236.57</td><td>1.45</td></tr><tr><td>4.00</td><td>181.13</td><td>1.66</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	1288.01	0.62	2.25	572.45	0.93	3.50	236.57	1.45	4.00	181.13	1.66
	h(m)	E0°(lx)	ø(m)																																													
	1.50	3327.12	0.41																																													
	2.25	1478.72	0.61																																													
	3.50	611.10	0.95																																													
4.00	467.88	1.09																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	2444.55	0.30																																														
2.25	1086.47	0.45																																														
3.50	449.00	0.70																																														
4.00	343.76	0.80																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	1288.01	0.62																																														
2.25	572.45	0.93																																														
3.50	236.57	1.45																																														
4.00	181.13	1.66																																														

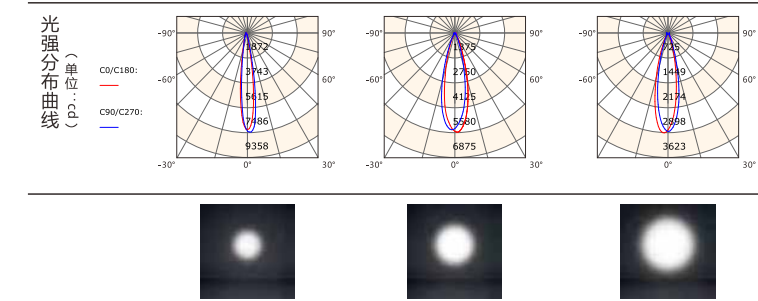

品舰系列射灯


产品型号: KLM-SD65125P/15W
产品尺寸: Ø65*125mm
材 质: 6063铝
外观颜色: 砂黑色/砂白色
防护等级: IP20
调 光: 支持
光 源: Honourtek/Luminus
电 压: DC24V/DC48V
功 率: 15W
色 温: 2700K/3000K/4000K
CRI : ≥90
光 束 角: 15° /24° /38°



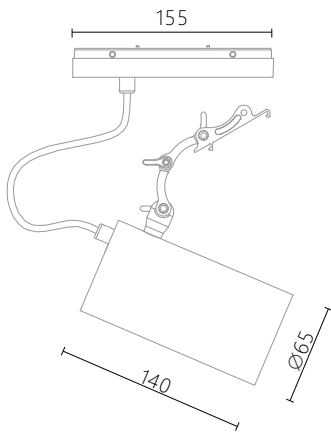

光学参数

光束角	15°	24°	38°																																													
光通量	406.7 lm	369.5 lm	258.5 lm																																													
照度距离关系	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>1392.28</td><td>0.43</td></tr><tr><td>2.25</td><td>618.79</td><td>0.64</td></tr><tr><td>3.50</td><td>255.72</td><td>1.00</td></tr><tr><td>4.00</td><td>195.79</td><td>1.15</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	1392.28	0.43	2.25	618.79	0.64	3.50	255.72	1.00	4.00	195.79	1.15	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>685.09</td><td>0.64</td></tr><tr><td>2.25</td><td>304.48</td><td>0.95</td></tr><tr><td>3.50</td><td>125.83</td><td>1.48</td></tr><tr><td>4.00</td><td>96.34</td><td>1.69</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	685.09	0.64	2.25	304.48	0.95	3.50	125.83	1.48	4.00	96.34	1.69	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>196.43</td><td>1.16</td></tr><tr><td>2.25</td><td>87.30</td><td>1.75</td></tr><tr><td>3.50</td><td>36.08</td><td>2.72</td></tr><tr><td>4.00</td><td>27.62</td><td>3.11</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	196.43	1.16	2.25	87.30	1.75	3.50	36.08	2.72	4.00	27.62	3.11
h(m)	E0°(lx)	ø(m)																																														
1.50	1392.28	0.43																																														
2.25	618.79	0.64																																														
3.50	255.72	1.00																																														
4.00	195.79	1.15																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	685.09	0.64																																														
2.25	304.48	0.95																																														
3.50	125.83	1.48																																														
4.00	96.34	1.69																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	196.43	1.16																																														
2.25	87.30	1.75																																														
3.50	36.08	2.72																																														
4.00	27.62	3.11																																														

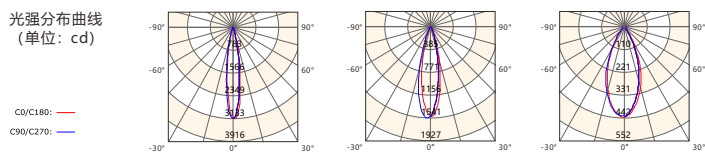

2700K

3000K

4000K

品舰系列射灯

产品型号: KLM-SD75140P/20W

产品尺寸: Ø65*140mm

材 质: 6063铝

外观颜色: 砂黑色/砂白色

防护等级: IP20

调 光: 支持

光 源: Honourtek/Luminus


电 压: DC48V

功 率: 20W

色 温: 2700K/3000K/4000K


CRI : ≥90

光 束 角: 15° /24° /38°

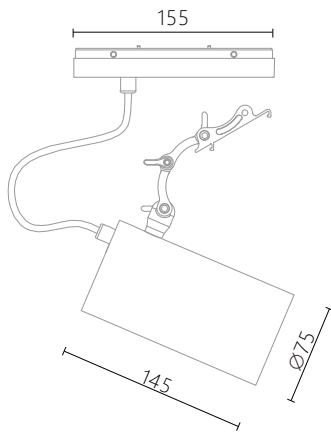

光学参数

光束角	15°	24°	38°																																													
光通量	345.3 lm	403.8 lm	258.5 lm																																													
照度距离关系	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>1018.54</td><td>0.56</td></tr><tr><td>2.25</td><td>452.69</td><td>0.84</td></tr><tr><td>3.50</td><td>187.08</td><td>1.30</td></tr><tr><td>4.00</td><td>143.23</td><td>1.48</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	1018.54	0.56	2.25	452.69	0.84	3.50	187.08	1.30	4.00	143.23	1.48	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>740.50</td><td>0.57</td></tr><tr><td>2.25</td><td>329.11</td><td>0.86</td></tr><tr><td>3.50</td><td>136.01</td><td>1.33</td></tr><tr><td>4.00</td><td>104.13</td><td>1.52</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	740.50	0.57	2.25	329.11	0.86	3.50	136.01	1.33	4.00	104.13	1.52	<table><tr><td>h(m)</td><td>E0°(lx)</td><td>ø(m)</td></tr><tr><td>1.50</td><td>196.43</td><td>1.16</td></tr><tr><td>2.25</td><td>87.30</td><td>1.75</td></tr><tr><td>3.50</td><td>36.08</td><td>2.72</td></tr><tr><td>4.00</td><td>27.62</td><td>3.11</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	196.43	1.16	2.25	87.30	1.75	3.50	36.08	2.72	4.00	27.62	3.11
	h(m)	E0°(lx)	ø(m)																																													
	1.50	1018.54	0.56																																													
	2.25	452.69	0.84																																													
	3.50	187.08	1.30																																													
4.00	143.23	1.48																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	740.50	0.57																																														
2.25	329.11	0.86																																														
3.50	136.01	1.33																																														
4.00	104.13	1.52																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	196.43	1.16																																														
2.25	87.30	1.75																																														
3.50	36.08	2.72																																														
4.00	27.62	3.11																																														

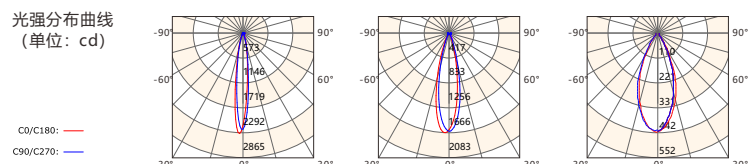

2700K

3000K

4000K

品舰系列射灯

产品型号: KLM-SD75145P/25W

产品尺寸: Ø75*145mm

材 质: 6063铝

外观颜色: 砂黑色/砂白色

防护等级: IP20

调 光: 支持

光 源: Honourtek/Luminus

电 压: DC48V




功 率: 25W

色 温: 2700K/3000K/4000K

CRI : ≥90

光 束 角: 15° /24° /38°



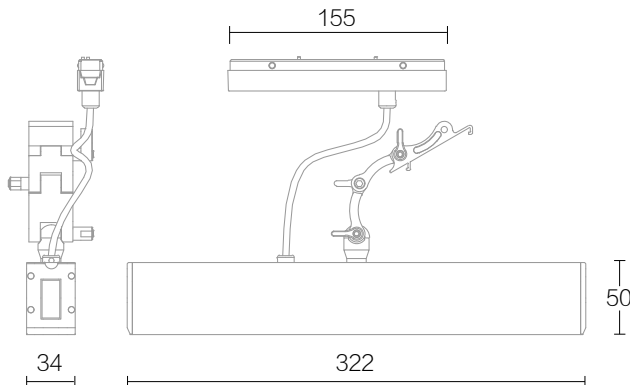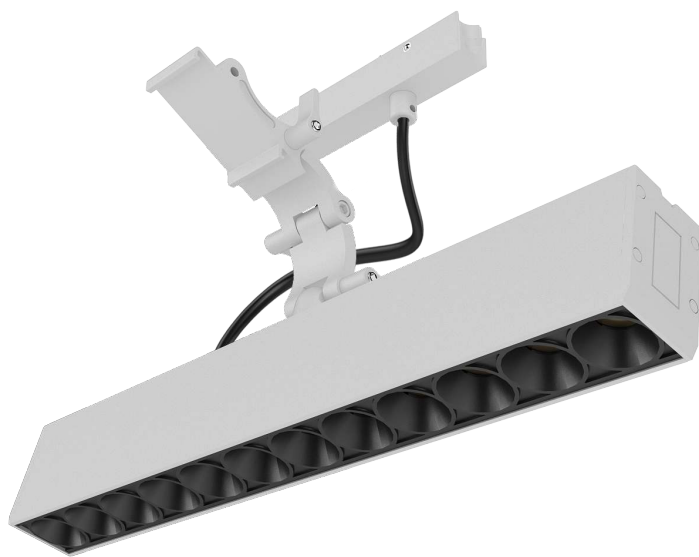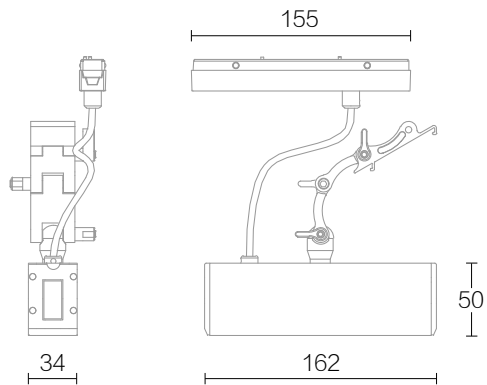

可调光



安装方便

CRI

高显指



无频闪



高效节能



名师设计



环保材料

光学参数

光束角	10°	24°	34°	48°	10°*35°																																																																											
光通量	406.0 lm	434.3 lm	488.4lm	387.5 lm	292.7lm																																																																											
照度距离关系	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1001.40</td><td>0.42</td></tr><tr><td>2.25</td><td>445.07</td><td>0.63</td></tr><tr><td>3.50</td><td>183.93</td><td>0.99</td></tr><tr><td>4.00</td><td>140.82</td><td>1.13</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	1001.40	0.42	2.25	445.07	0.63	3.50	183.93	0.99	4.00	140.82	1.13	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>928.63</td><td>0.59</td></tr><tr><td>2.25</td><td>413.17</td><td>0.89</td></tr><tr><td>3.50</td><td>170.75</td><td>1.39</td></tr><tr><td>4.00</td><td>130.73</td><td>1.58</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	928.63	0.59	2.25	413.17	0.89	3.50	170.75	1.39	4.00	130.73	1.58	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>623.99</td><td>0.77</td></tr><tr><td>2.25</td><td>277.33</td><td>1.15</td></tr><tr><td>3.50</td><td>114.61</td><td>1.79</td></tr><tr><td>4.00</td><td>87.75</td><td>2.05</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	623.99	0.77	2.25	277.33	1.15	3.50	114.61	1.79	4.00	87.75	2.05	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>352.57</td><td>1.10</td></tr><tr><td>2.25</td><td>156.70</td><td>1.66</td></tr><tr><td>3.50</td><td>64.76</td><td>2.58</td></tr><tr><td>4.00</td><td>49.58</td><td>2.95</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	352.57	1.10	2.25	156.70	1.66	3.50	64.76	2.58	4.00	49.58	2.95	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>568.05</td><td>0.44</td></tr><tr><td>2.25</td><td>252.47</td><td>0.66</td></tr><tr><td>3.50</td><td>104.34</td><td>1.03</td></tr><tr><td>4.00</td><td>79.88</td><td>1.18</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	568.05	0.44	2.25	252.47	0.66	3.50	104.34	1.03	4.00	79.88	1.18
h(m)	E0°(lx)	ø(m)																																																																														
1.50	1001.40	0.42																																																																														
2.25	445.07	0.63																																																																														
3.50	183.93	0.99																																																																														
4.00	140.82	1.13																																																																														
h(m)	E0°(lx)	ø(m)																																																																														
1.50	928.63	0.59																																																																														
2.25	413.17	0.89																																																																														
3.50	170.75	1.39																																																																														
4.00	130.73	1.58																																																																														
h(m)	E0°(lx)	ø(m)																																																																														
1.50	623.99	0.77																																																																														
2.25	277.33	1.15																																																																														
3.50	114.61	1.79																																																																														
4.00	87.75	2.05																																																																														
h(m)	E0°(lx)	ø(m)																																																																														
1.50	352.57	1.10																																																																														
2.25	156.70	1.66																																																																														
3.50	64.76	2.58																																																																														
4.00	49.58	2.95																																																																														
h(m)	E0°(lx)	ø(m)																																																																														
1.50	568.05	0.44																																																																														
2.25	252.47	0.66																																																																														
3.50	104.34	1.03																																																																														
4.00	79.88	1.18																																																																														
光强分布曲线																																																																																



品舰系列格栅线性灯

产品型号: KLM-GSD3450P/L162/12W

产品尺寸: L162*W34*H50mm

材 质: 6063铝

外观颜色: 砂黑色/砂白色

防护等级: IP20

调 光: 支持

光 源: Osram

电 压: DC24V/DC48V

功 率: 12W

色 温: 2700K/3000K/4000K

CRI : ≥90

光 束 角: 10° /24° /34° /48° /10°*35°

色温对比图例



2700K



3000K



4000K



可调光



安装方便

CRI

高显指



无频闪



高效节能








名师设计



环保材料

光学参数

光束角	10°	24°	34°	48°	10°*35°																																																																											
光通量	684.9 lm	823.4 lm	792.9 lm	633.8 lm	749.9lm																																																																											
照度距离关系	<table><tr><th>h(m)</th><th>E0⁺(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>2595.11</td><td>0.38</td></tr><tr><td>2.25</td><td>1153.38</td><td>0.58</td></tr><tr><td>3.50</td><td>476.65</td><td>0.90</td></tr><tr><td>4.00</td><td>364.94</td><td>1.03</td></tr></table>	h(m)	E0 ⁺ (lx)	ø(m)	1.50	2595.11	0.38	2.25	1153.38	0.58	3.50	476.65	0.90	4.00	364.94	1.03	<table><tr><th>h(m)</th><th>E0⁺(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1951.89</td><td>0.59</td></tr><tr><td>2.25</td><td>867.51</td><td>0.89</td></tr><tr><td>3.50</td><td>358.51</td><td>1.38</td></tr><tr><td>4.00</td><td>274.49</td><td>1.57</td></tr></table>	h(m)	E0 ⁺ (lx)	ø(m)	1.50	1951.89	0.59	2.25	867.51	0.89	3.50	358.51	1.38	4.00	274.49	1.57	<table><tr><th>h(m)</th><th>E0⁺(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1026.75</td><td>0.80</td></tr><tr><td>2.25</td><td>456.33</td><td>1.21</td></tr><tr><td>3.50</td><td>188.59</td><td>1.88</td></tr><tr><td>4.00</td><td>144.39</td><td>2.14</td></tr></table>	h(m)	E0 ⁺ (lx)	ø(m)	1.50	1026.75	0.80	2.25	456.33	1.21	3.50	188.59	1.88	4.00	144.39	2.14	<table><tr><th>h(m)</th><th>E0⁺(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>654.16</td><td>1.10</td></tr><tr><td>2.25</td><td>290.74</td><td>1.65</td></tr><tr><td>3.50</td><td>120.15</td><td>2.57</td></tr><tr><td>4.00</td><td>91.99</td><td>2.94</td></tr></table>	h(m)	E0 ⁺ (lx)	ø(m)	1.50	654.16	1.10	2.25	290.74	1.65	3.50	120.15	2.57	4.00	91.99	2.94	<table><tr><th>h(m)</th><th>E0⁺(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1713.98</td><td>0.39</td></tr><tr><td>2.25</td><td>761.77</td><td>0.59</td></tr><tr><td>3.50</td><td>314.81</td><td>0.91</td></tr><tr><td>4.00</td><td>241.03</td><td>1.05</td></tr></table>	h(m)	E0 ⁺ (lx)	ø(m)	1.50	1713.98	0.39	2.25	761.77	0.59	3.50	314.81	0.91	4.00	241.03	1.05
h(m)	E0 ⁺ (lx)	ø(m)																																																																														
1.50	2595.11	0.38																																																																														
2.25	1153.38	0.58																																																																														
3.50	476.65	0.90																																																																														
4.00	364.94	1.03																																																																														
h(m)	E0 ⁺ (lx)	ø(m)																																																																														
1.50	1951.89	0.59																																																																														
2.25	867.51	0.89																																																																														
3.50	358.51	1.38																																																																														
4.00	274.49	1.57																																																																														
h(m)	E0 ⁺ (lx)	ø(m)																																																																														
1.50	1026.75	0.80																																																																														
2.25	456.33	1.21																																																																														
3.50	188.59	1.88																																																																														
4.00	144.39	2.14																																																																														
h(m)	E0 ⁺ (lx)	ø(m)																																																																														
1.50	654.16	1.10																																																																														
2.25	290.74	1.65																																																																														
3.50	120.15	2.57																																																																														
4.00	91.99	2.94																																																																														
h(m)	E0 ⁺ (lx)	ø(m)																																																																														
1.50	1713.98	0.39																																																																														
2.25	761.77	0.59																																																																														
3.50	314.81	0.91																																																																														
4.00	241.03	1.05																																																																														
光强分布曲线 (单位:cd)																																																																																



品舰系列格栅线性灯

产品型号: KLM-GSD3450P/L322/24W

产品尺寸: L322*W34*H50mm

材 质: 6063铝

外观颜色: 砂黑色/砂白色

防护等级: IP20

调 光: 支持

光 源: Osram

电 压: DC24V/DC48V

功 率: 24W

色 温: 2700K/3000K/4000K

CRI : ≥90

光 束 角: 10° /24° /34° /48° /10°*35°

色温对比图例



2700K






3000K



4000K


多种灯具搭配，
满足多种照明环境。

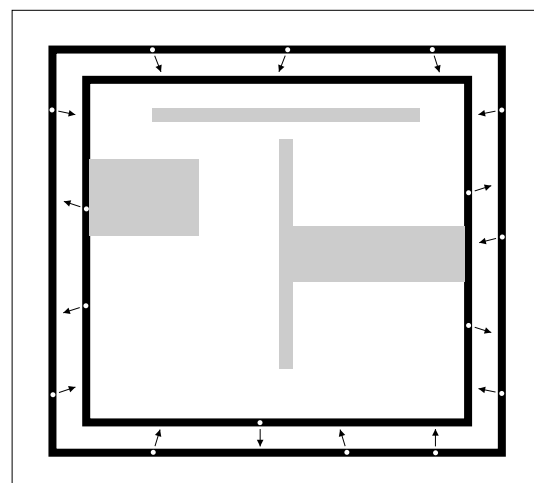

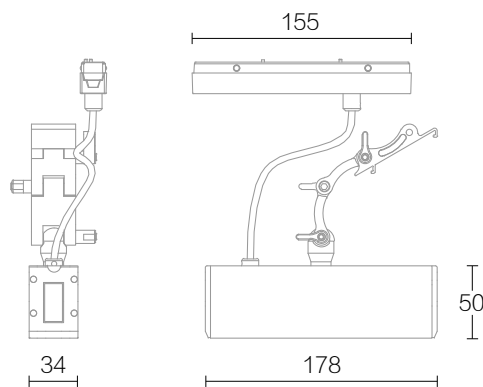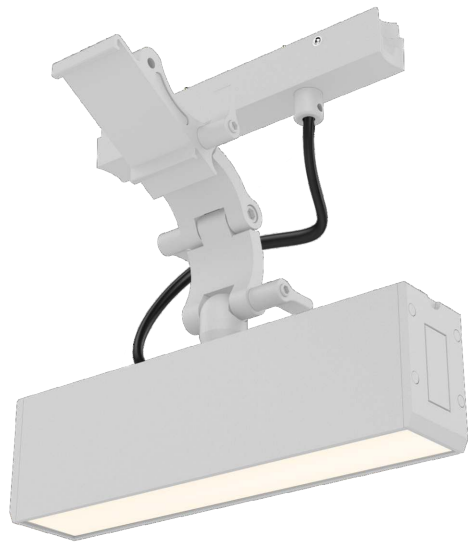




光学参数

光束角	100°															
光通量	167.1 lm															
照度距离关系	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>30.04</td><td>3.64</td></tr><tr><td>2.25</td><td>13.35</td><td>5.46</td></tr><tr><td>3.50</td><td>5.52</td><td>8.50</td></tr><tr><td>4.00</td><td>4.22</td><td>9.72</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	30.04	3.64	2.25	13.35	5.46	3.50	5.52	8.50	4.00	4.22	9.72
h(m)	E0°(lx)	ø(m)														
1.50	30.04	3.64														
2.25	13.35	5.46														
3.50	5.52	8.50														
4.00	4.22	9.72														

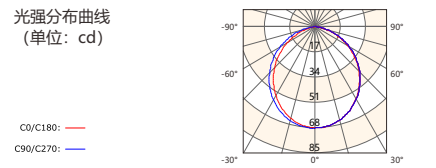


品舰系列射灯

产品型号: KLM-PMD3450P/L178/8W
产品尺寸: L178*W34*H50mm
材 质: 6063铝
外观颜色: 砂黑色/砂白色
防护等级: IP20
调 光: 支持
光 源: Osram
电 压: DC24V/DC48V
功 率: 8W
色 温: 2700K/3000K/4000K
CRI : ≥90
光 束 角: 100°

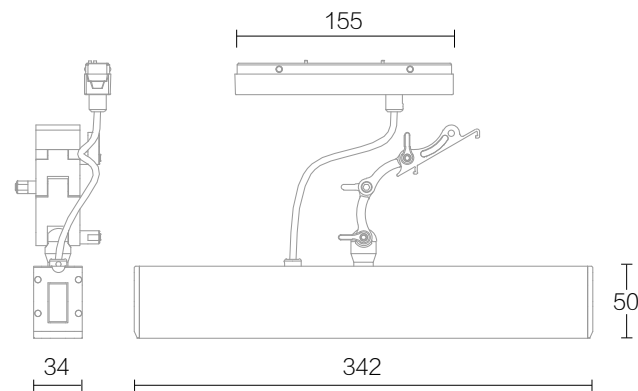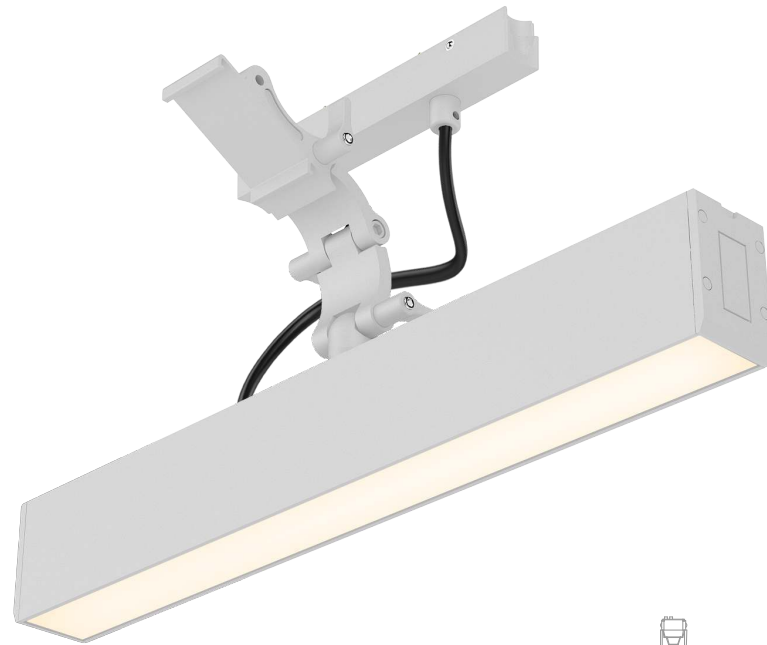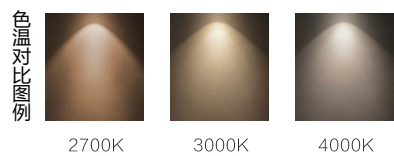


光学参数


光束角	100°															
光通量	353.0 lm															
照度距离关系	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>62.15</td><td>3.72</td></tr><tr><td>2.25</td><td>27.62</td><td>5.57</td></tr><tr><td>3.50</td><td>11.42</td><td>8.67</td></tr><tr><td>4.00</td><td>8.74</td><td>9.91</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	62.15	3.72	2.25	27.62	5.57	3.50	11.42	8.67	4.00	8.74	9.91
h(m)	E0°(lx)	ø(m)														
1.50	62.15	3.72														
2.25	27.62	5.57														
3.50	11.42	8.67														
4.00	8.74	9.91														

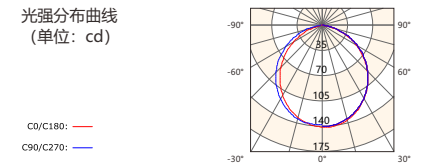



品舰系列射灯


产品型号: KLM-PMD3450P/L342/16W
产品尺寸: L342*W34*H50mm
材 质: 6063铝
外观颜色: 砂黑色/砂白色
防护等级: IP20
调 光: 支持
光 源: Osram
电 压: DC24V/DC48V
功 率: 16W
色 温: 2700K/3000K/4000K
CRI : ≥90
光 束 角: 100°

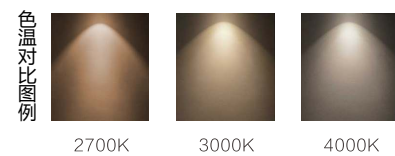


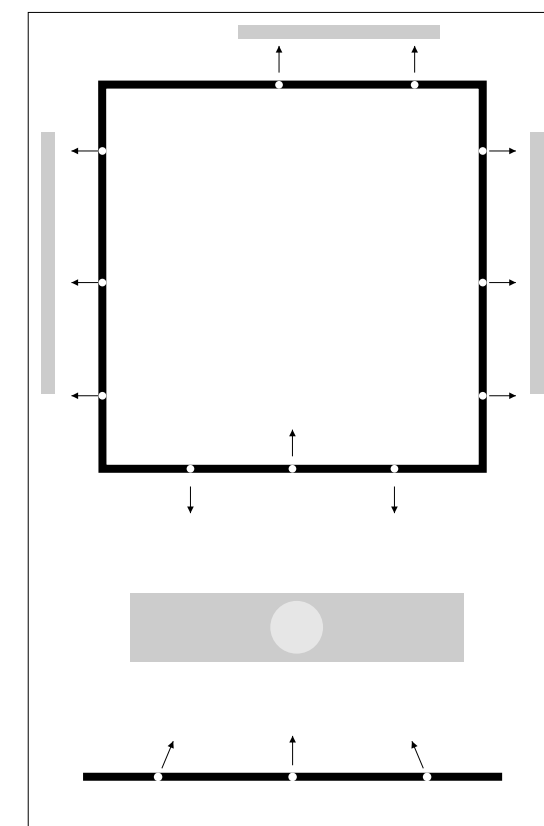

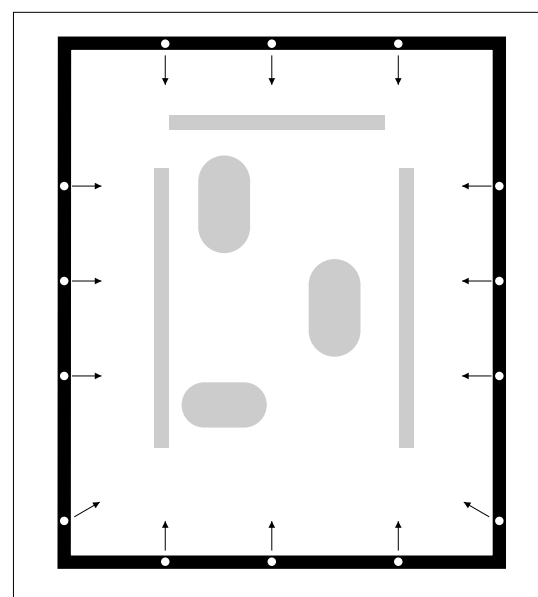

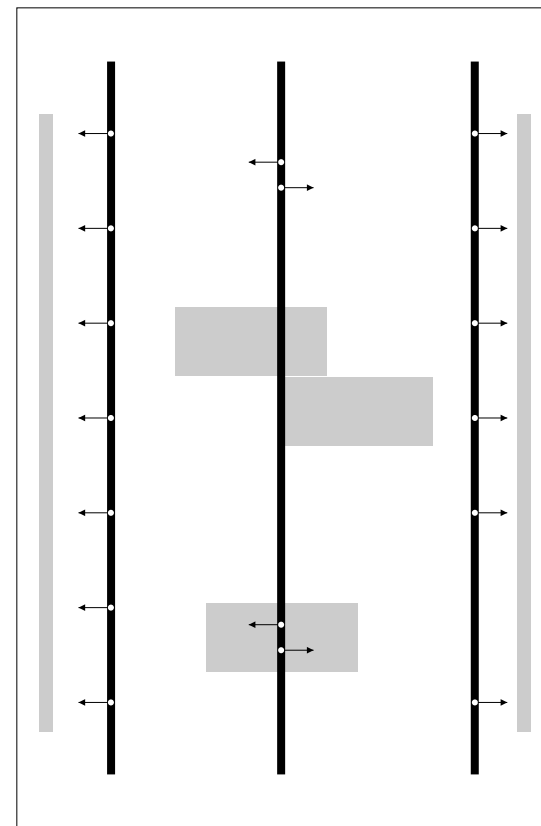


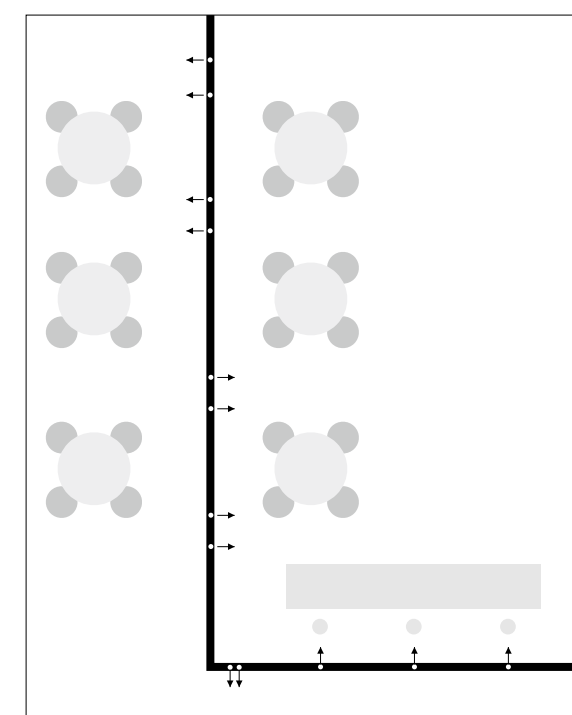

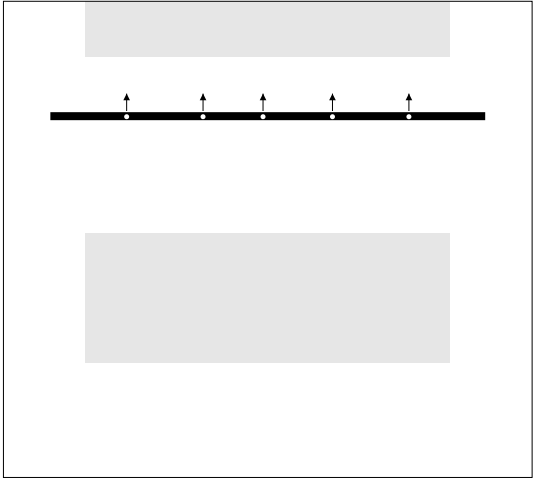


暗藏槽尺寸

拼接说明

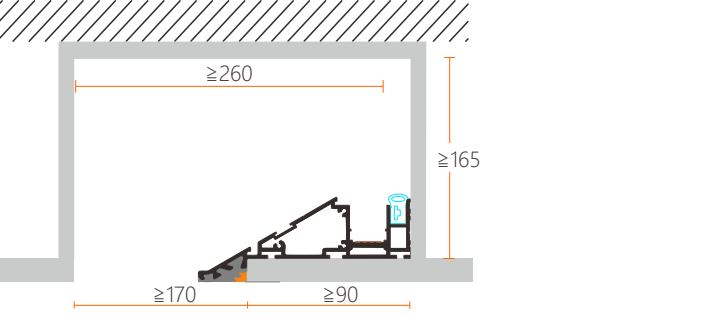


产品名称：品舰系列磁吸组合石膏轨道
产品型号：KLM-GD11343A/L1000

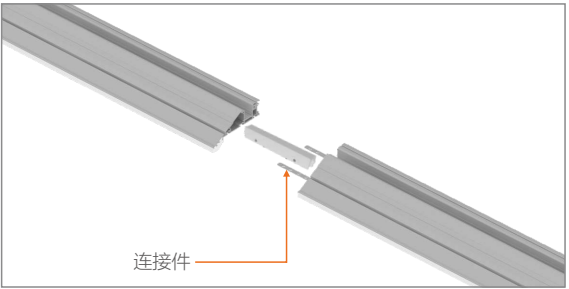

将连接件插入轨道连接槽,再将所需拼接的轨道对准连接件插入即完成拼接。


产品默认出厂控制设置接线方式

整组控制

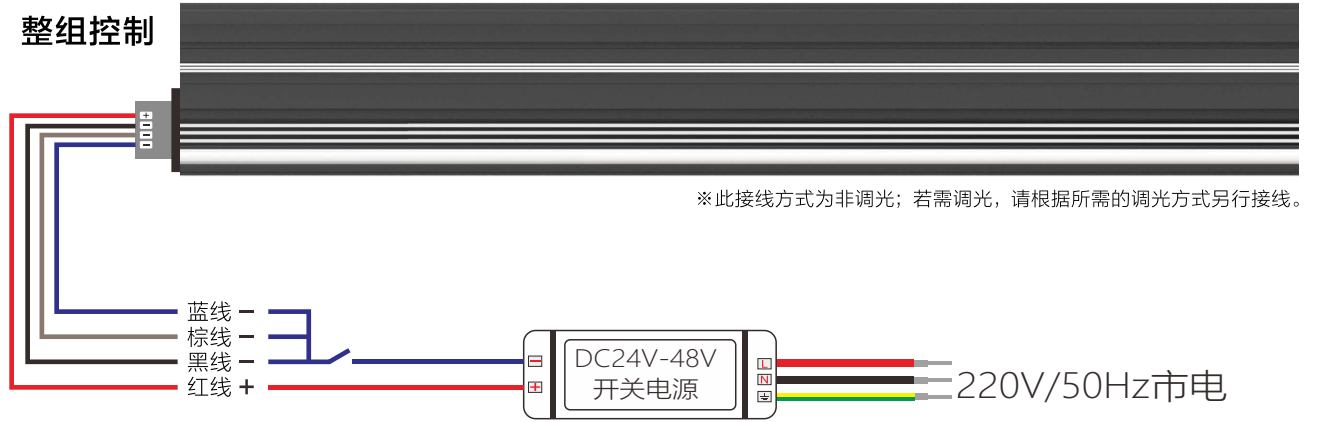

※此接线方式为非调光；若需调光，请根据所需的调光方式另行接线。

分组控制

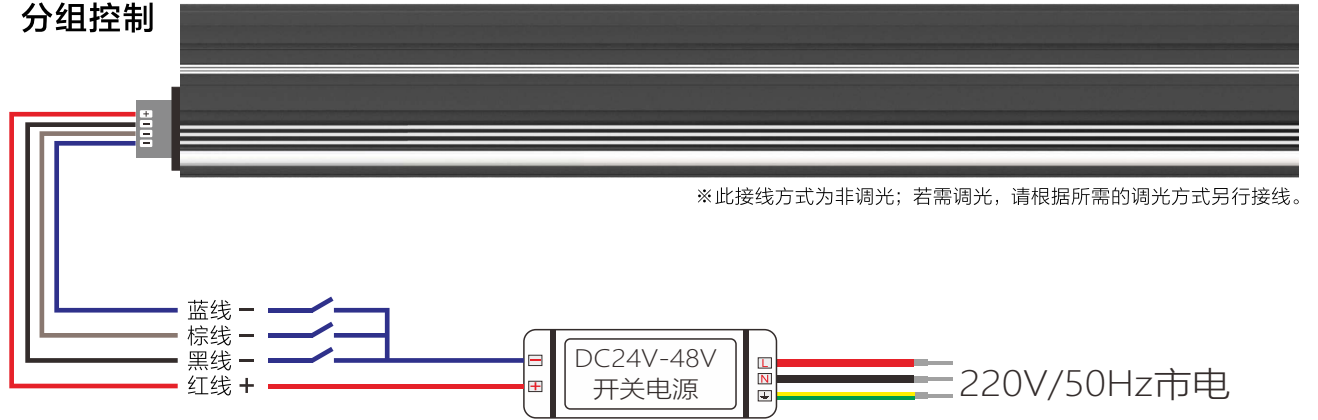


※此接线方式为非调光；若需调光，请根据所需的调光方式另行接线。

- 温馨提示/警告:
- 1.成套照明系统采用低压开关电源供电，匹配电源时根据所订购的灯具电压选购DC24V/DC48V开关电源，开关电源总功率需大于发光体功率20%以上,例如某组线路安装线性灯5支,每支功率12W,总功率为60W,那么应配置总功率为75W以上开关电源。
 - 2.为使压降降到最小,灯具轨道安装长度不适合超过5米,5米为一组单独分线供电，如有必要，建议3米为一组进行单独分线于电源供电。
 - 3.产品默认出厂控制设置接线方式（如上图），如有特殊要求控制方式，请与生产商联系，沟通，请勿私自更改线路及控制方式。
 - 4.任何情况下,灯具都不能被隔热衬垫或类似材料覆盖!



安装说明

1

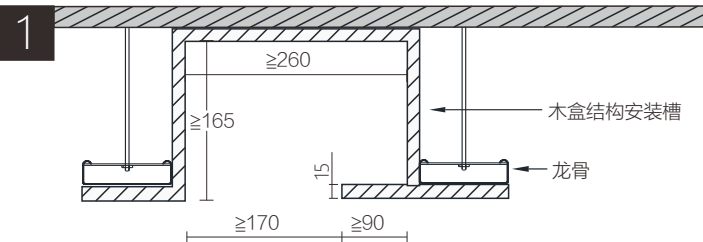


木盒结构安装槽

龙骨


螺丝钉把轨道固定好

2

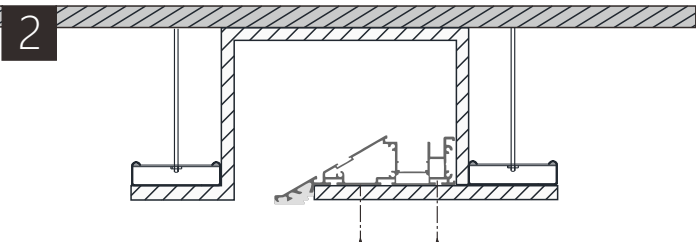

螺丝钉把轨道固定好

3

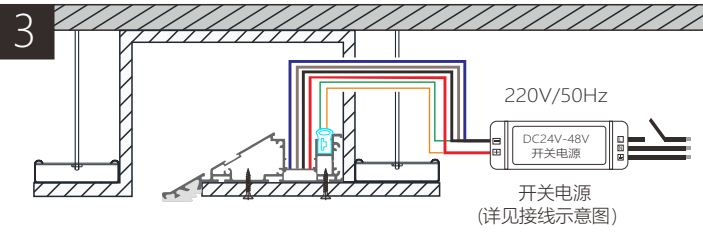


220V/50Hz

DC24V-48V 开关电源

开关电源 (详见接线示意图)

4

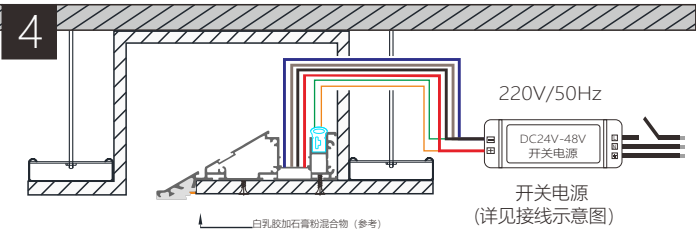

220V/50Hz


DC24V-48V 开关电源

开关电源 (详见接线示意图)

白乳胶加石膏粉混合物 (参考)

专用砂布

5

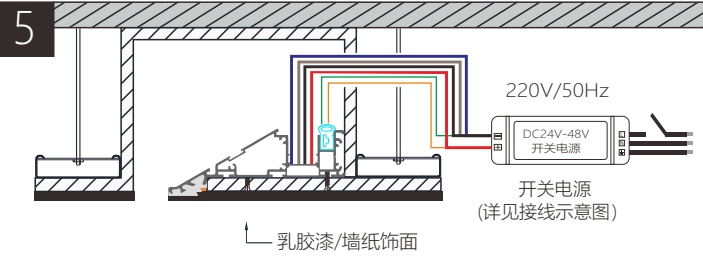

220V/50Hz

DC24V-48V 开关电源


开关电源 (详见接线示意图)

乳胶漆/墙纸饰面

刮腻子与轨道上的石膏刮平，用砂纸将表面打磨光滑：做天花饰面，饰面做乳胶漆/墙纸/其他，完成天花饰面后，安装灯具，合上电闸亮灯。

暗藏槽尺寸


拼接说明

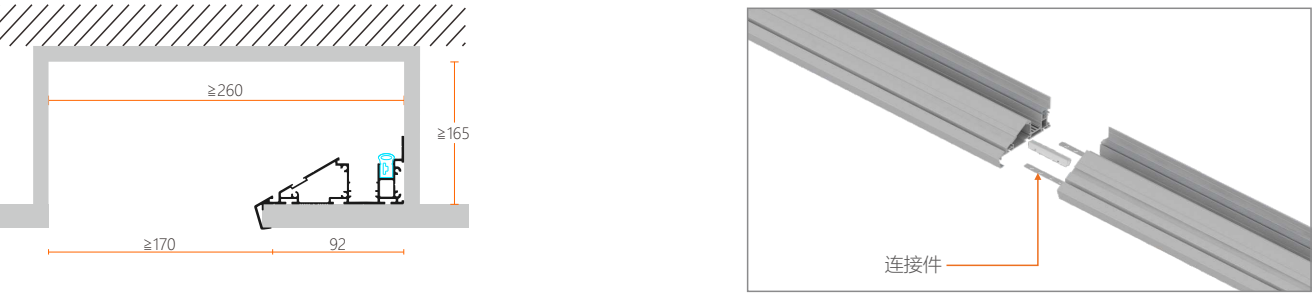

产品名称：品舰系列磁吸组合轨道
产品型号：KLM-GD9962A/L1000


将连接件插入轨道连接槽,再将所需拼接的轨道对准连接件插入即完成拼接。

安装说明

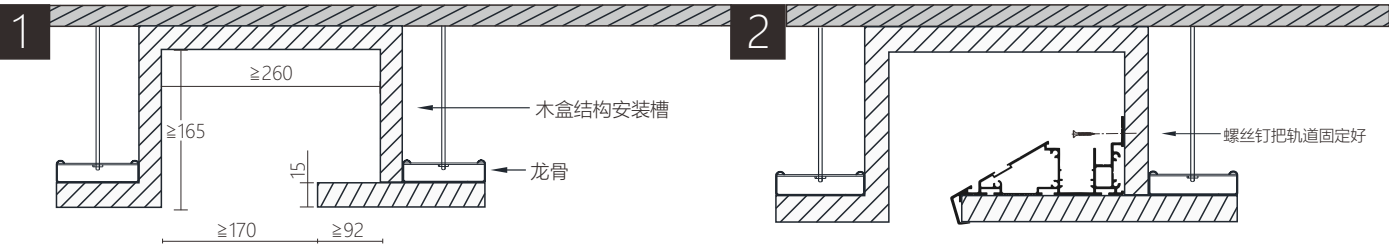

制作木盒安装槽,按照轨道暗藏槽尺寸预留轨道安装空间;

将轨道安装到暗藏木盒安装板上，用自攻螺丝钉把轨道固定好。

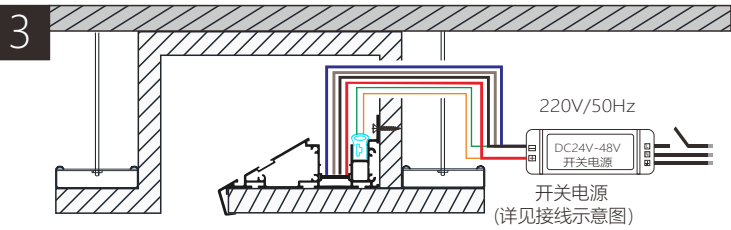

连接轨道供电系统（详见接线示意图）确认完全连接好供电系统，并确保轨道供电全线畅通。







