

Ultra thin

Magnetic Lighting
System



Ultra thin Magnetic Lighting Syste

Track bar



	Recessed		Surface Recessed	
				
	KLM-GD4820Y/L1000	KLM-GD4822Y/L1000	KLM-GD4520Q/L1000	KLM-GD2620Q/L1000
	Suspended / Surface			
				
	KLM-GD2120D/L1000			

Lamps

				
KLM-ZCSD2265/1W	KLM-ZCSD2265/3W	KLM-ZCSD3463/5W		
				
KLM-ZCDX25150/5W	KLM-ZCDX25200/5W	KLM-ZCDX25300/5W	KLM-ZCDX6068/5W	
				
KLM-ZCGS1552/L211/T5W	KLM-ZCGS1552/L283/T7W	KLM-ZCGS1511/L139/2W	KLM-ZCGS1511/L211/5W	KLM-ZCGS1511/L355/10W
				
KLM-ZCGS1511/L499/15W	KLM-ZCGS1511/L1003/30W			
				
KLM-ZCPM1552/L211/T5W	KLM-ZCPM1552/L283/T7W	KLM-ZCPM1511/L268/2W	KLM-ZCPM1511/L468/4W	KLM-ZCPM1511/L668/6W
				
KLM-ZCPM1511/L868/8W	KLM-ZCPM1511/L1068/10W			

Recessed mounted

Item no.:KLM-GD4820Y/L1000
Size:W48*H20mm
L:L1000/1500/2000mm
Single control 6063 Aluminum
Color: Sand BK / Sand WH
IP Rate:IP20
Cut hole:W25*H20mm
Ceiling thickness:9mm

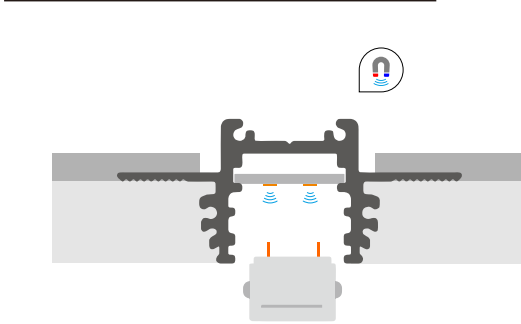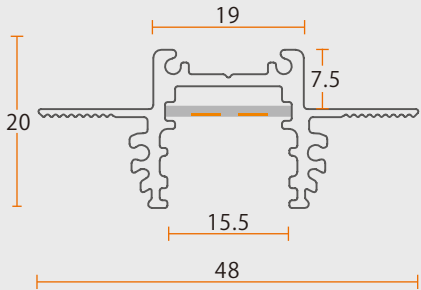

Accessories




Lamps




Adjustable recessed mounted


Item no.:KLM-GD4822Y/L1000
Size:W48*H22mmL:L1000/1500/2000mm
Single control 6063 Aluminum
Color: Sand BK / Sand WH
IP Rate:IP20
Cut hole:W30*H20mm
Ceiling thickness:9-12mm

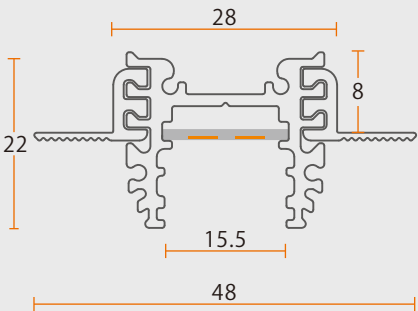

在有限的空间中, 筑造出无限艺术光影
是我们的追求

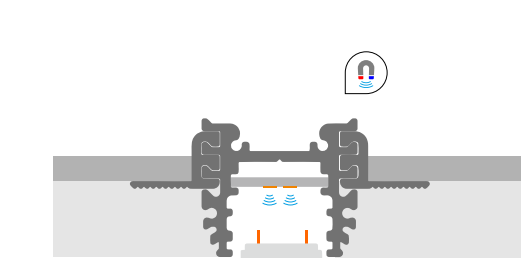

Ceiling thickness 9mm

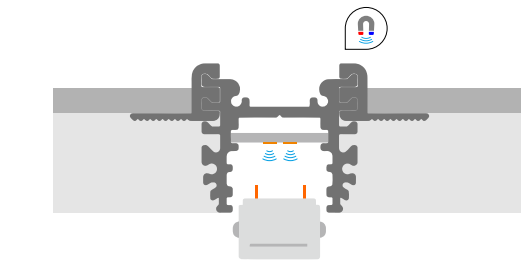

Ceiling thickness 12mm

Accessories



Lamps






Low floor recommended



Trimless Recessed mounted

Item no.:KLM-GD4520Q/L1000
Size:W45*H20mm
L:L1000/1500/2000mm
Single Control 6063 Aluminum
Color: Sand BK / Sand WH
IP Rate:IP20
Cut hole:W25*H30mm
Ceiling thickness:9mm

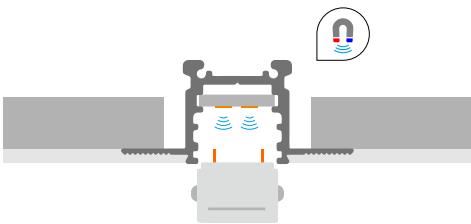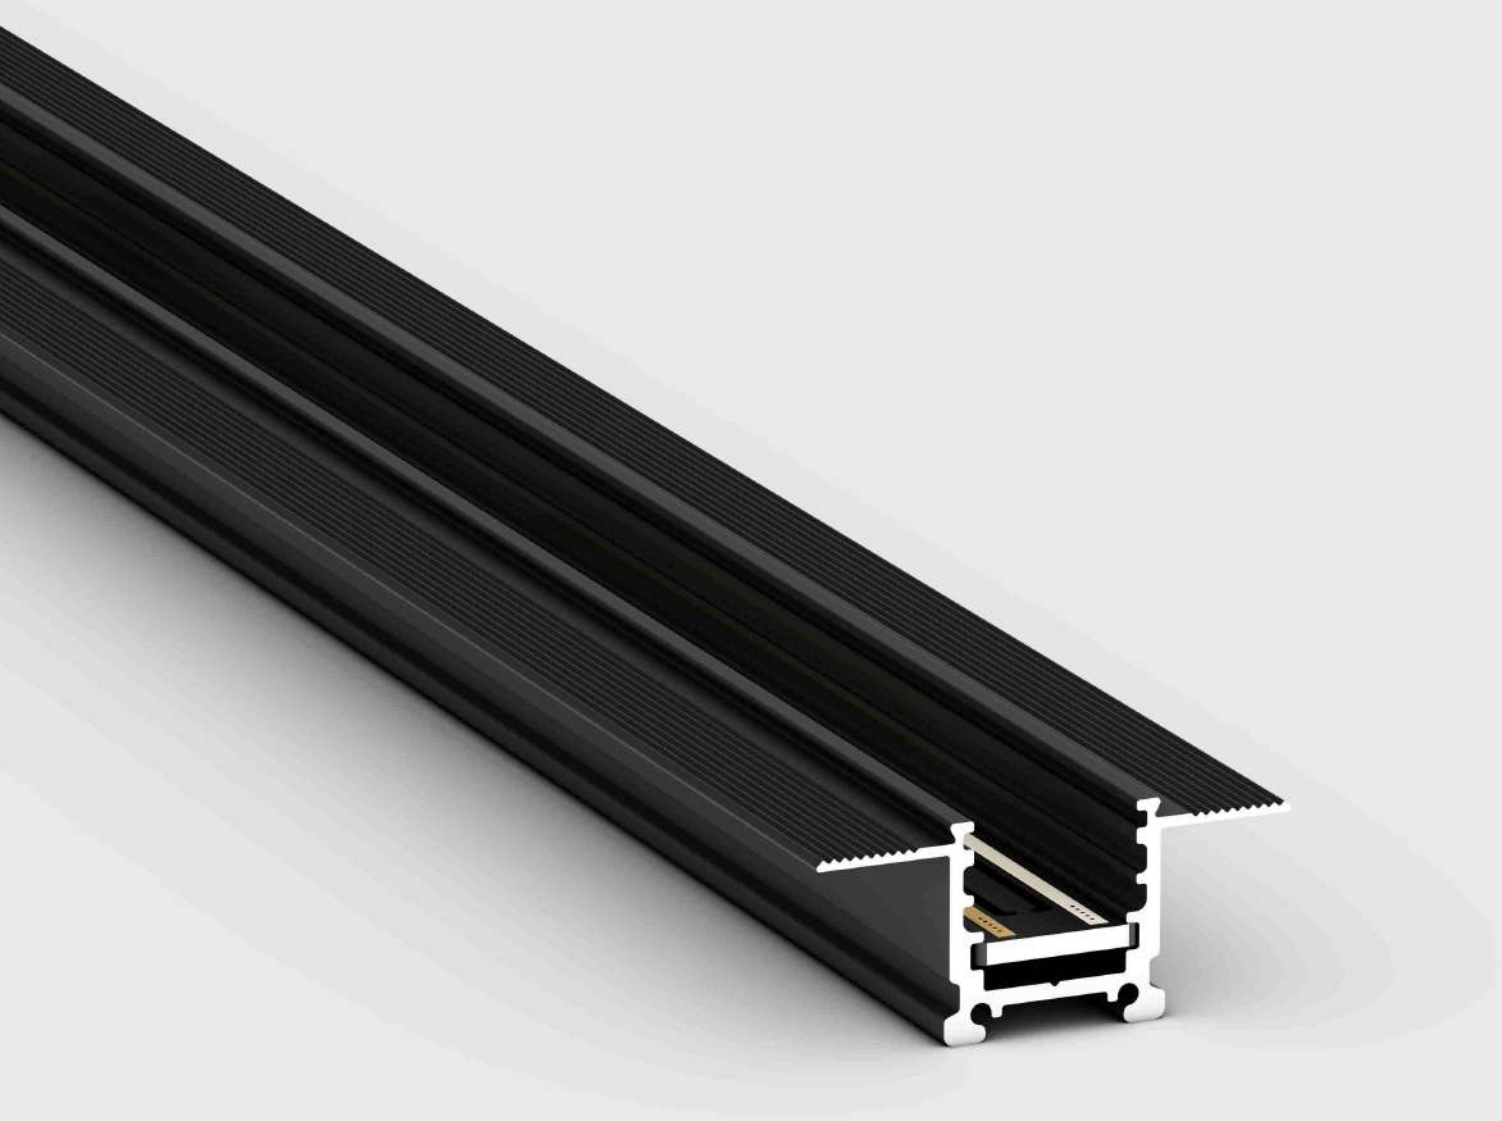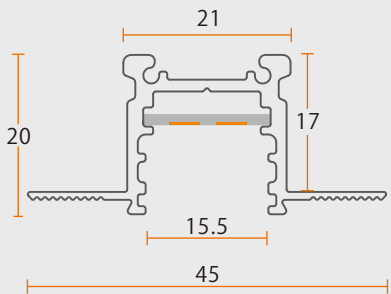

Accessories



Lamps



柜子•磁吸灯组合

打造温馨整洁的家



Accessories





Lamps




Surface recessed mounted

Item no.:KLM-GD2620Q/L1000
Size:W26*H20mmL:L1000/1500/2000mm
Single control 6063 Aluminum
Color: Sand BK / Sand WH
IP Rate:IP20
Cut hole:W22*H30mm
Ceiling thickness:9mm

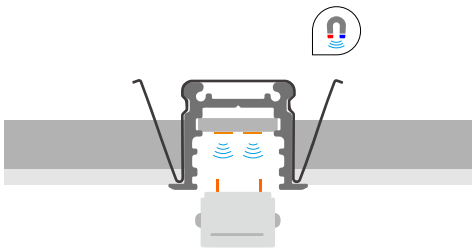



告别复杂、厚重感
隐匿于无形, 尽显无主灯极简风范

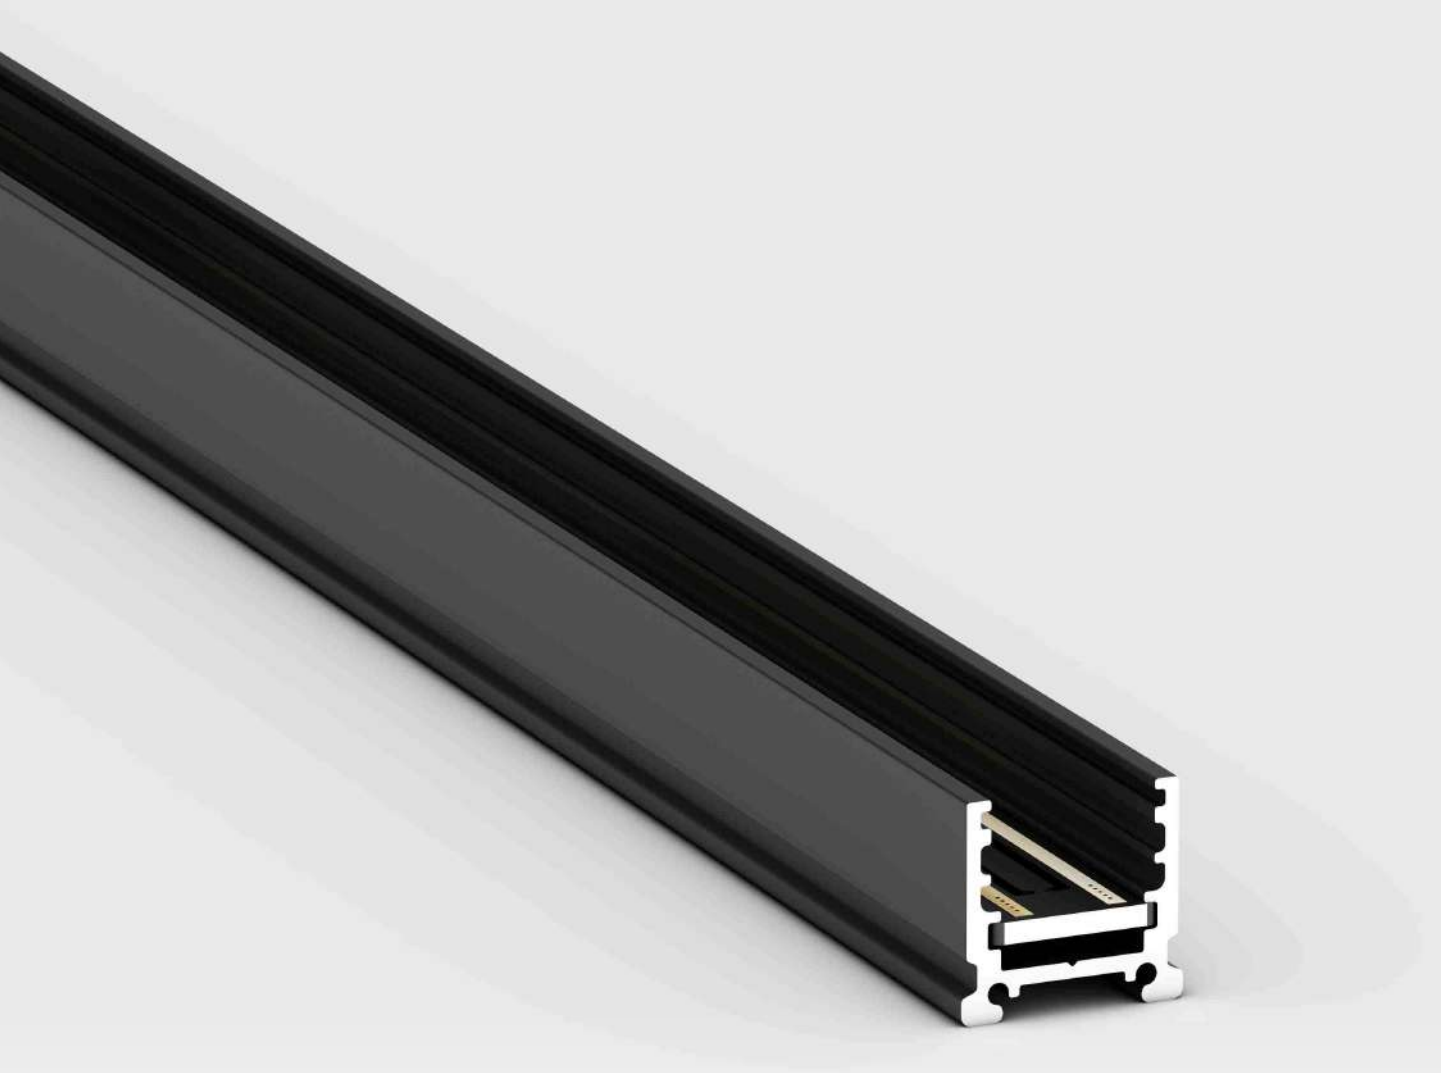

Surface / Suspended
mounted

Item no.:KLM-GD2120D/L1000
Size:W21*H20mm
L:L1000/1500/2000mm

Single control 6063 Aluminum
Color: Sand BK / Sand WH
IP Rate:IP20

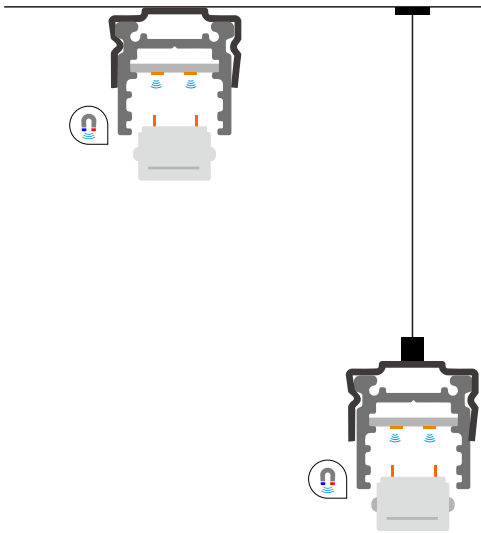

Accessories




Lamps





Spotlights

Item no.: KLM-ZCSD2265/1W
Size: Ø22*L65mm
6063 Aluminum
Color: Sand BK / Sand WH
IP Rate: IP20
Can do DIM
LEDs: Osram/Bridgelux
Voltage: DC24V
Power: 1W
CCT: 2700K/3000K/4000K
C R I : ≥90
Beam angle: 15°/24°

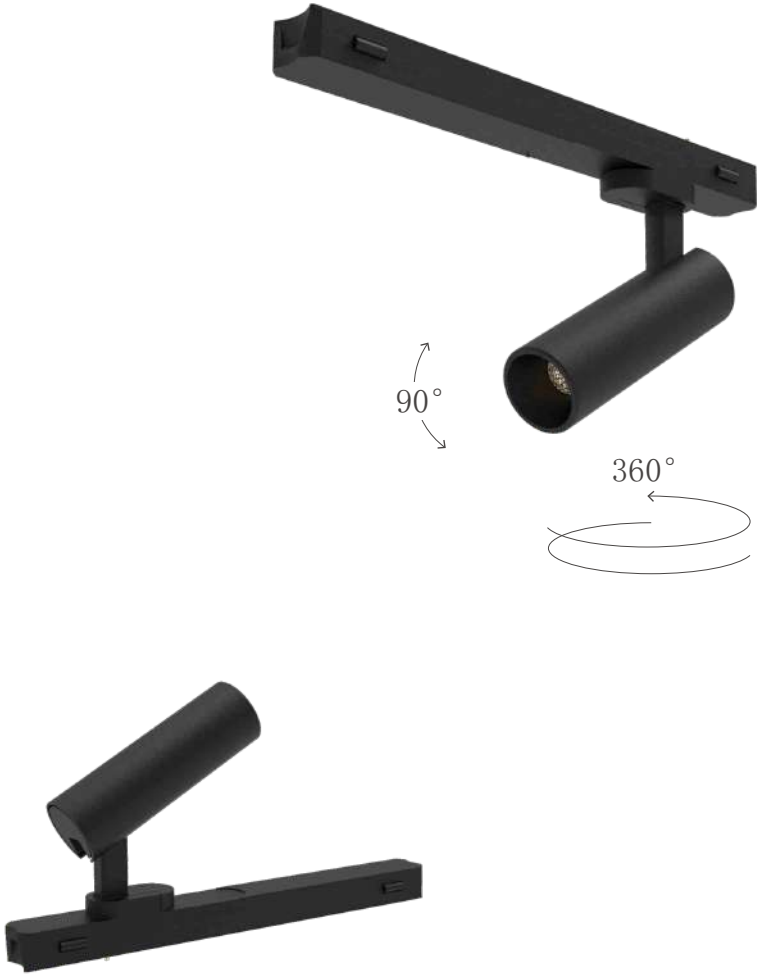


Suitable track bar

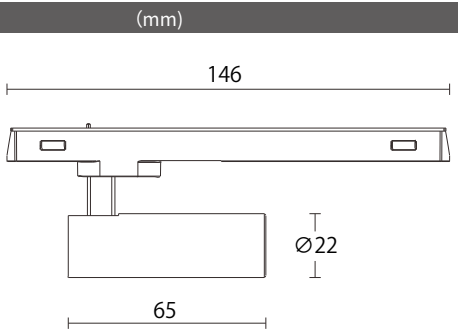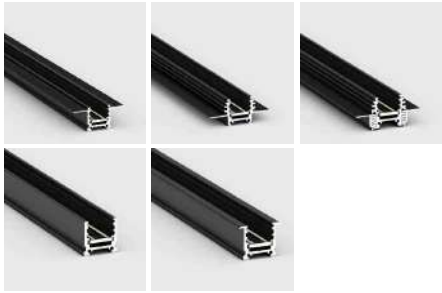


Specification

	15°	24°																														
	63.145 lm	60.83																														
	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>165.65</td><td>0.53</td></tr><tr><td>2.25</td><td>85.69</td><td>0.79</td></tr><tr><td>3.50</td><td>32.68</td><td>1.24</td></tr><tr><td>4.00</td><td>24.36</td><td>1.41</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	165.65	0.53	2.25	85.69	0.79	3.50	32.68	1.24	4.00	24.36	1.41	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>128.62</td><td>0.62</td></tr><tr><td>2.25</td><td>60.35</td><td>0.93</td></tr><tr><td>3.50</td><td>25.46</td><td>1.45</td></tr><tr><td>4.00</td><td>17.69</td><td>1.65</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	128.62	0.62	2.25	60.35	0.93	3.50	25.46	1.45	4.00	17.69	1.65
h(m)	E0°(lx)	ø(m)																														
1.50	165.65	0.53																														
2.25	85.69	0.79																														
3.50	32.68	1.24																														
4.00	24.36	1.41																														
h(m)	E0°(lx)	ø(m)																														
1.50	128.62	0.62																														
2.25	60.35	0.93																														
3.50	25.46	1.45																														
4.00	17.69	1.65																														


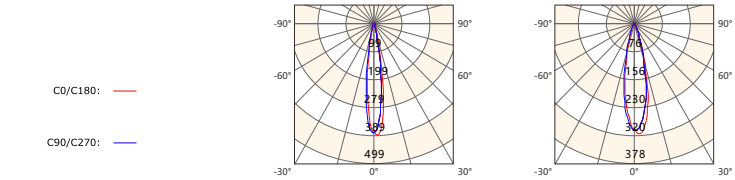


Spotlights

Item no.: KLM-ZCSD2265/3W
Size: Ø22*L65mm
6063 Aluminum
Color: Sand BK/ Sand WH
IP Rate: IP20
Can do DIM
LEDs: Osram/Bridgelux
Voltage: DC24V
Power: 3W
CCT: 2700K/3000K/4000K
C R I : ≥90
Beam angle: 15°/24°

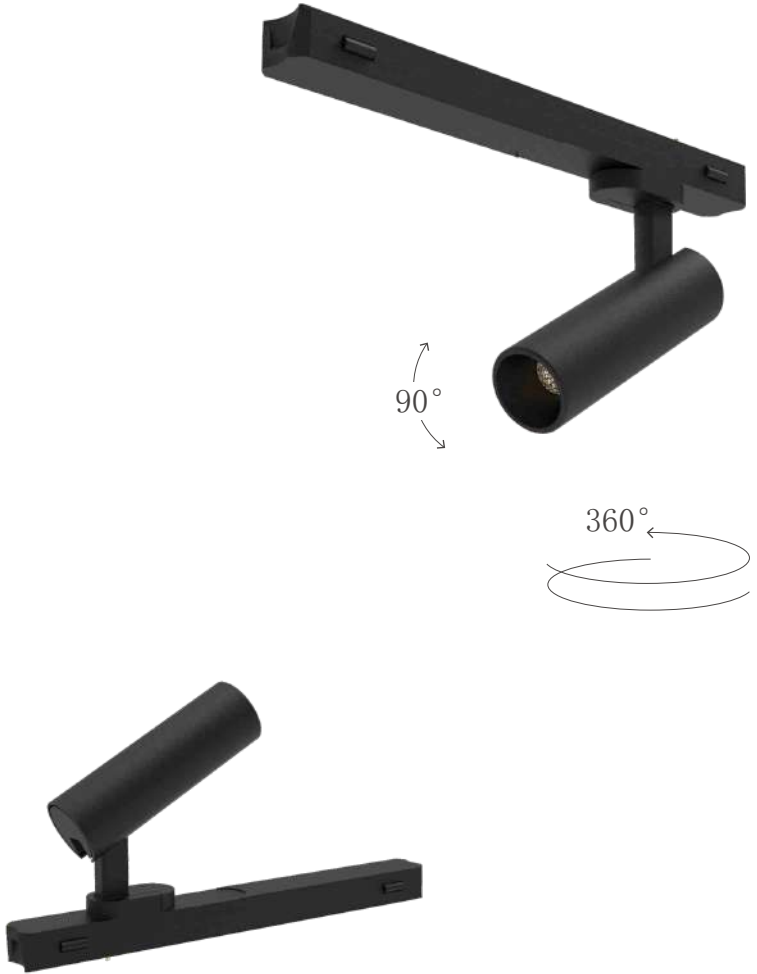


Suitable track bar

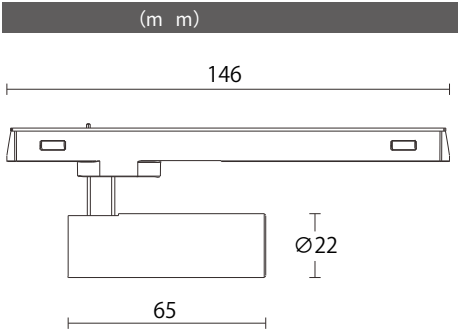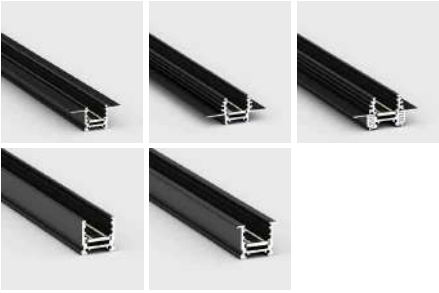


Specification

	15°	24°																														
	246.3 lm	166.6 lm																														
	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>773.66</td><td>0.41</td></tr><tr><td>2.25</td><td>343.85</td><td>0.61</td></tr><tr><td>3.50</td><td>142.10</td><td>0.95</td></tr><tr><td>4.00</td><td>108.80</td><td>1.08</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	773.66	0.41	2.25	343.85	0.61	3.50	142.10	0.95	4.00	108.80	1.08	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>328.86</td><td>0.60</td></tr><tr><td>2.25</td><td>146.16</td><td>0.90</td></tr><tr><td>3.50</td><td>60.40</td><td>1.40</td></tr><tr><td>4.00</td><td>46.25</td><td>1.60</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	328.86	0.60	2.25	146.16	0.90	3.50	60.40	1.40	4.00	46.25	1.60
h(m)	E0°(lx)	ø(m)																														
1.50	773.66	0.41																														
2.25	343.85	0.61																														
3.50	142.10	0.95																														
4.00	108.80	1.08																														
h(m)	E0°(lx)	ø(m)																														
1.50	328.86	0.60																														
2.25	146.16	0.90																														
3.50	60.40	1.40																														
4.00	46.25	1.60																														

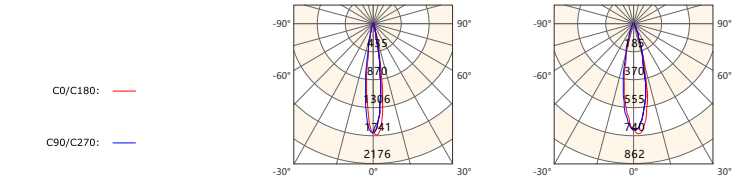


Spotlights

Item no.: KLM-ZCSD3463/5W
Size: Ø34*L63mm
6063 Aluminum
Color: Sand BK / Sand WH
IP Rate: IP20
Cand do DIM
LEDs: Osram/Bridgelux
Voltage: DC24V
Power: 5W
CCT: 2700K/3000K/4000K
C R I : ≥90
Beam angle: 15°/24°/38°

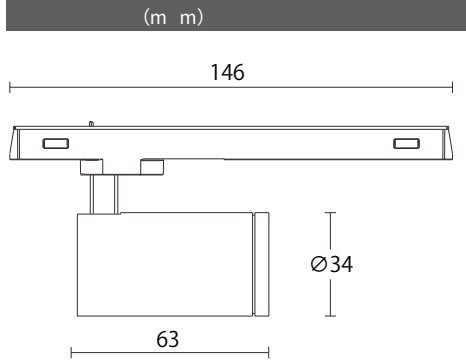

Specification

15°			24°			38°		
345.3 lm			403.8 lm			258.5 lm		
h(m)	E0°(lx)	ø (m)	h(m)	E0°(lx)	ø (m)	h(m)	E0°(lx)	ø (m)
1.50	1018.54	0.56	1.50	535.86	0.64	1.50	196.43	1.16
2.25	452.69	0.84	2.25	238.16	0.96	2.25	87.30	1.75
3.50	187.08	1.30	3.50	98.42	1.49	3.50	36.08	2.72
4.00	143.23	1.48	4.00	75.36	1.71	4.00	27.62	3.11

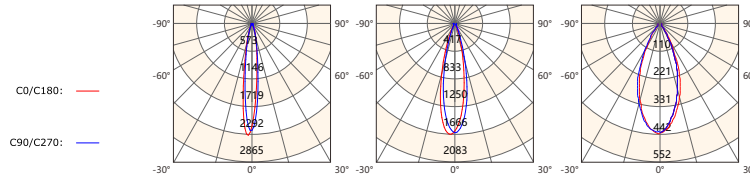







Pendant light

Item no.:KLM-ZCDX25150/5W
Size: Ø25*L150mm
6063 Aluminum
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs: onourtek/Luminus
Voltage :DC24V
Power:1W/3W/5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:15°/24°/38°



Pendant light



Item no.:KLM-ZCDX25200/5W
Size: Ø25*L200mm
6063 Aluminum
Color: Sand BK /Sand WH
IP Rate :IP20
Can be DIM
LEDs:Honourtek/Luminus
Voltage :DC24V
Power:1W/3W/5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:15°/24°/38°

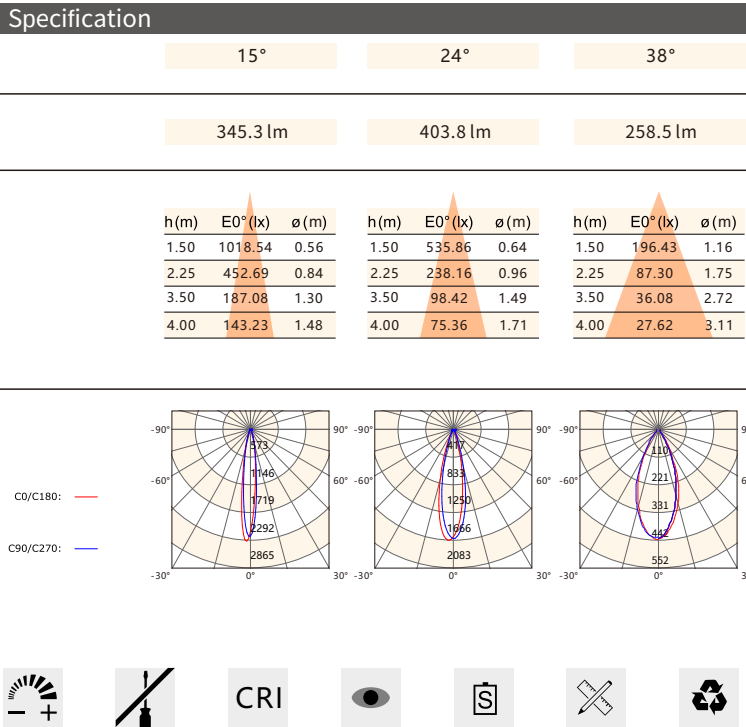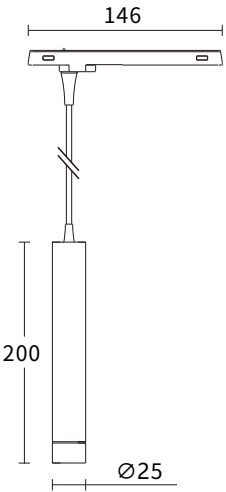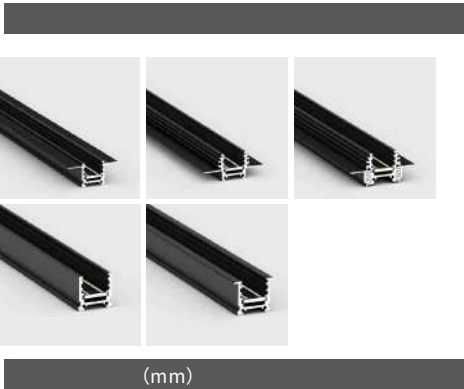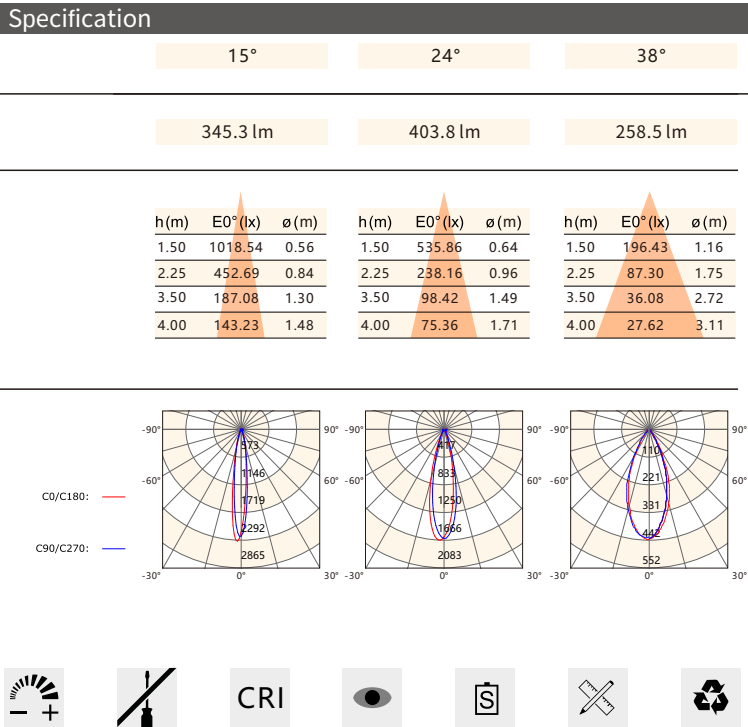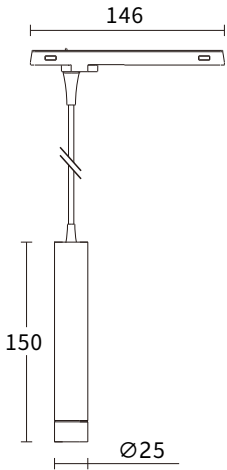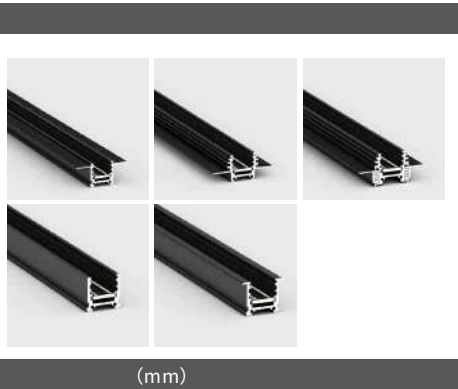



Pendant light

Item no.:KLM-ZCDX25300/5W
Size: Ø25*L300mm
6063 Aluminum
Color: Sand BK /Sand WH
IP Rate :IP20
Can do DIM
LEDs:Honourtek/Luminus
Voltage:DC24V
Power:1W/3W/5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:15°/24°/38°

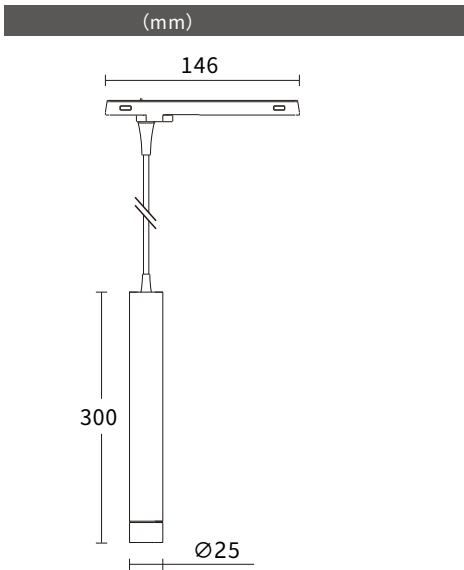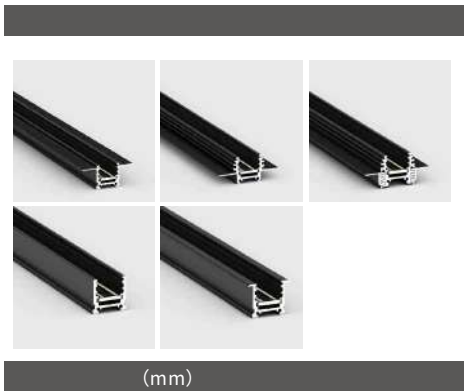

Specification



	15°	24°	38°																																													
	345.3 lm	403.8 lm	258.5 lm																																													
	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>1018.54</td><td>0.56</td></tr><tr><td>2.25</td><td>452.69</td><td>0.84</td></tr><tr><td>3.50</td><td>187.08</td><td>1.30</td></tr><tr><td>4.00</td><td>143.23</td><td>1.48</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	1018.54	0.56	2.25	452.69	0.84	3.50	187.08	1.30	4.00	143.23	1.48	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>535.86</td><td>0.64</td></tr><tr><td>2.25</td><td>238.16</td><td>0.96</td></tr><tr><td>3.50</td><td>98.42</td><td>1.49</td></tr><tr><td>4.00</td><td>75.36</td><td>1.71</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	535.86	0.64	2.25	238.16	0.96	3.50	98.42	1.49	4.00	75.36	1.71	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>196.43</td><td>1.16</td></tr><tr><td>2.25</td><td>87.30</td><td>1.75</td></tr><tr><td>3.50</td><td>36.08</td><td>2.72</td></tr><tr><td>4.00</td><td>27.62</td><td>3.11</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	196.43	1.16	2.25	87.30	1.75	3.50	36.08	2.72	4.00	27.62	3.11
h(m)	E0°(lx)	ø(m)																																														
1.50	1018.54	0.56																																														
2.25	452.69	0.84																																														
3.50	187.08	1.30																																														
4.00	143.23	1.48																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	535.86	0.64																																														
2.25	238.16	0.96																																														
3.50	98.42	1.49																																														
4.00	75.36	1.71																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	196.43	1.16																																														
2.25	87.30	1.75																																														
3.50	36.08	2.72																																														
4.00	27.62	3.11																																														

C0/C180: C90/C270:



Pendant light

Item no.:KLM-ZCDX6068/5W
Size: Ø60*L68mm
6063 Aluminium
Color: BK/RED/Dark Green
IP Rate :IP20
Can be DIM
LEDs:Honourtek/Luminus
Voltage:DC24V
Power:5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:15°/24°/38°

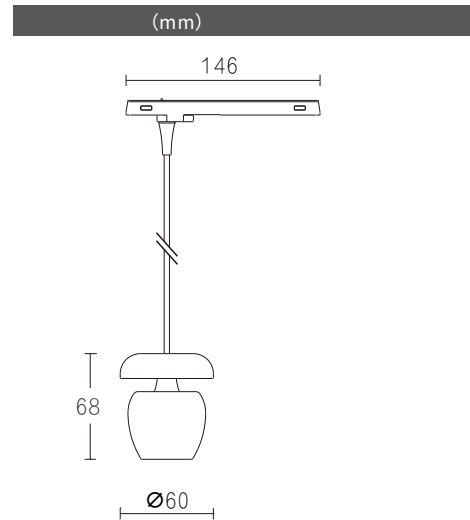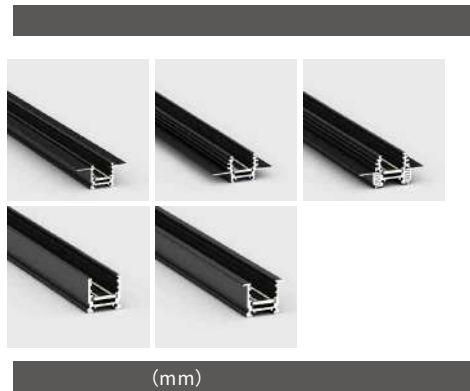

Specification

	15°	24°	38°																																													
	345.3 lm	403.8 lm	258.5 lm																																													
	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>1018.54</td><td>0.56</td></tr><tr><td>2.25</td><td>452.69</td><td>0.84</td></tr><tr><td>3.50</td><td>187.08</td><td>1.30</td></tr><tr><td>4.00</td><td>143.23</td><td>1.48</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	1018.54	0.56	2.25	452.69	0.84	3.50	187.08	1.30	4.00	143.23	1.48	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>535.86</td><td>0.64</td></tr><tr><td>2.25</td><td>238.16</td><td>0.96</td></tr><tr><td>3.50</td><td>98.42</td><td>1.49</td></tr><tr><td>4.00</td><td>75.36</td><td>1.71</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	535.86	0.64	2.25	238.16	0.96	3.50	98.42	1.49	4.00	75.36	1.71	<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>196.43</td><td>1.16</td></tr><tr><td>2.25</td><td>87.30</td><td>1.75</td></tr><tr><td>3.50</td><td>36.08</td><td>2.72</td></tr><tr><td>4.00</td><td>27.62</td><td>3.11</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	196.43	1.16	2.25	87.30	1.75	3.50	36.08	2.72	4.00	27.62	3.11
h(m)	E0°(lx)	ø(m)																																														
1.50	1018.54	0.56																																														
2.25	452.69	0.84																																														
3.50	187.08	1.30																																														
4.00	143.23	1.48																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	535.86	0.64																																														
2.25	238.16	0.96																																														
3.50	98.42	1.49																																														
4.00	75.36	1.71																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	196.43	1.16																																														
2.25	87.30	1.75																																														
3.50	36.08	2.72																																														
4.00	27.62	3.11																																														

C0/C180: C90/C270:



Adjustable grille lights

Item no.:KLM-
ZCGS1552/L211/T5W
Size:L211*W15*H52mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°





Specification

30°

102.9 lm

h (m)	EO° (lx)	ø (m)
1.50	142.75	1.01
2.25	63.44	1.52
3.50	26.22	2.37
4.00	20.07	2.71

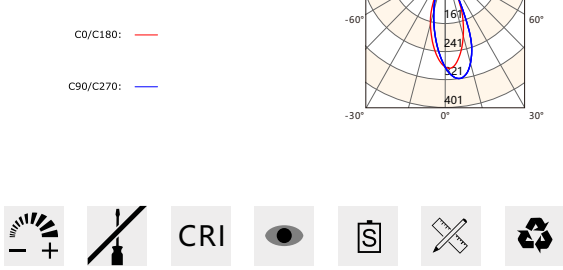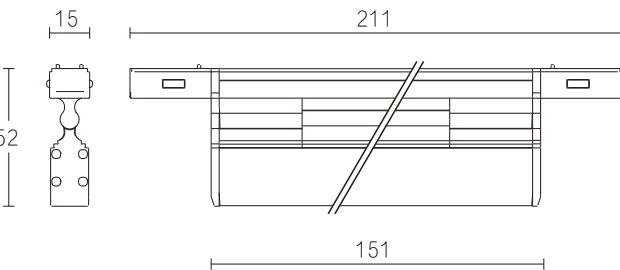

Adjustable grille lights

Item no.:KLM-
ZCGS1552/L283/T7W
Size:L283*W15*H52mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:7W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°





Specification

30°



149.6 lm

h (m)	EO° (lx)	ø (m)
1.50	207.46	1.02
2.25	92.20	1.54
3.50	38.10	2.39
4.00	29.17	2.73

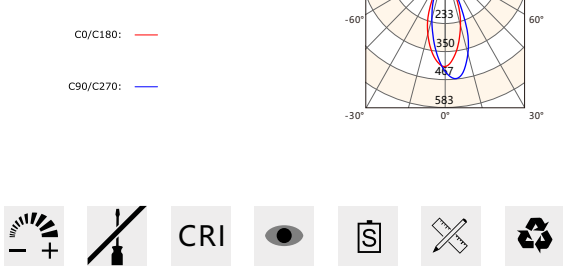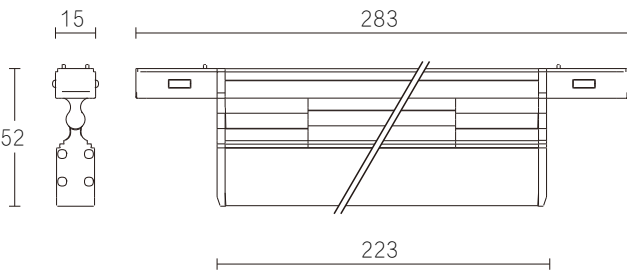




Item no.:KLM-
ZCGS1511/L139/2W
Size:L139*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:2W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°

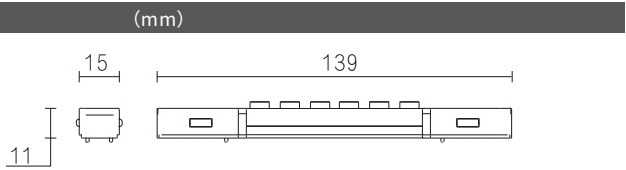
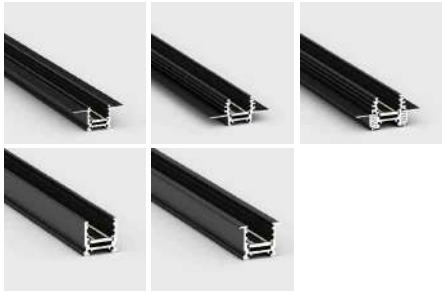


Specification

30°		
48.02 lm		
h (m)	E0° (lx)	ø (m)
1.50	70.04	1.00
2.25	31.13	1.50
3.50	12.86	2.34
4.00	9.85	2.67

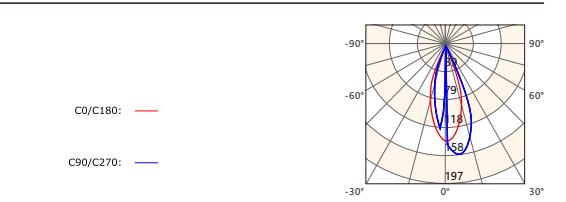


Item no.:KLM-
ZCGS1511/L211/5W
Size:L211*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:5W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°

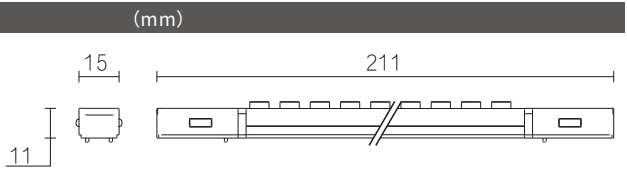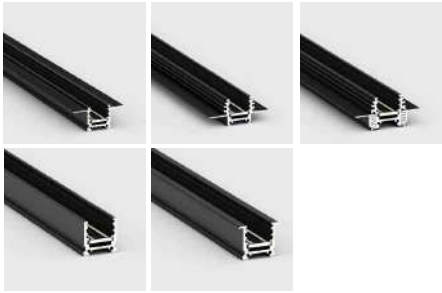




Specification

30°		
102.9 lm		
h (m)	E0° (lx)	ø (m)
1.50	142.75	1.01
2.25	63.44	1.52
3.50	26.22	2.37
4.00	20.07	2.71



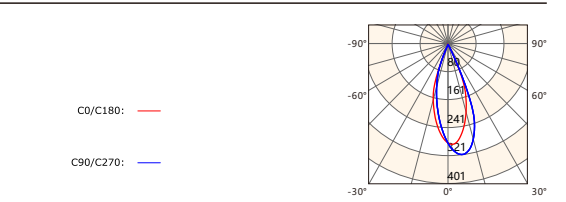




Item no.:KLM-
ZCGS1511/L355/10W
Size:L355*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:10W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°

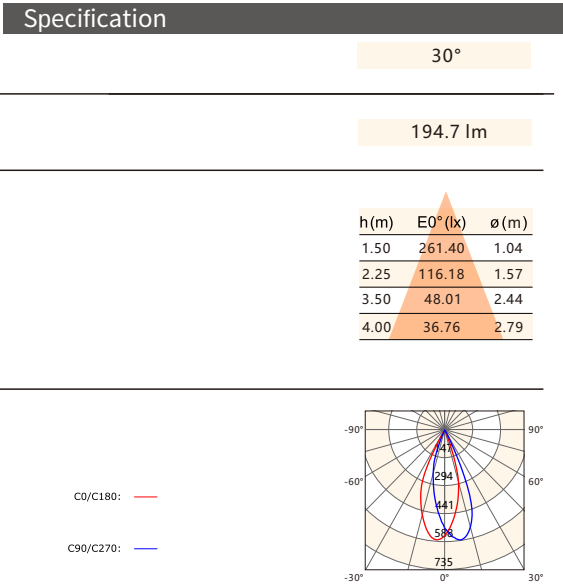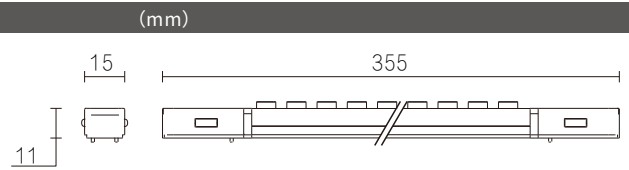
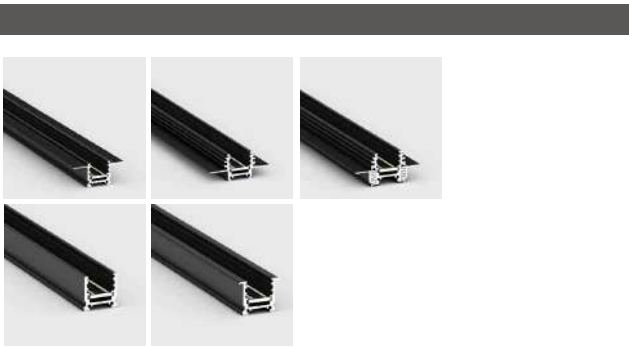


Item no.:KLM-
ZCGS1511/L499/15W
Size:L499*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:15W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:30°

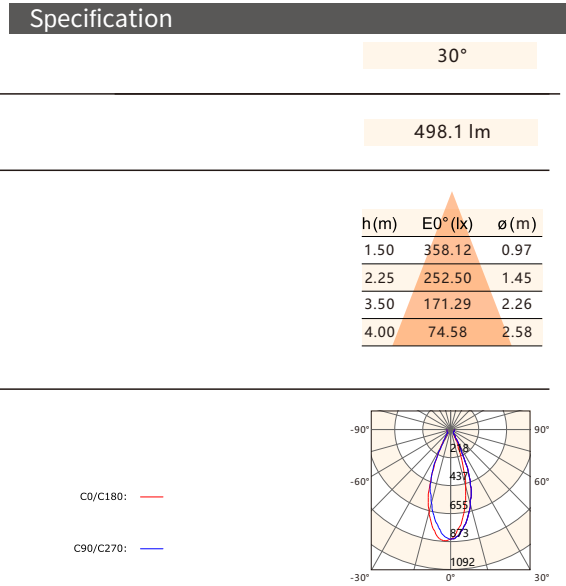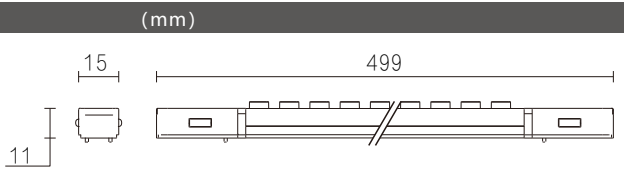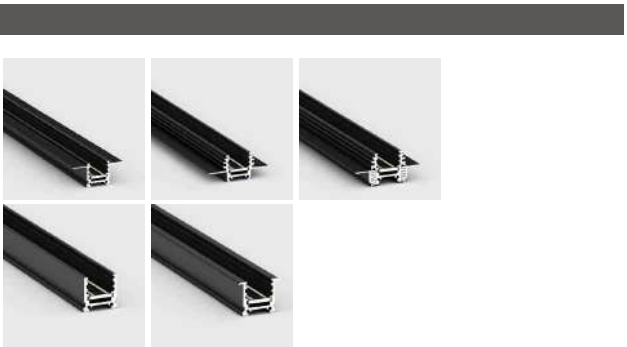



Item no.:KLM-
ZCGS1511/L1003/30W
Size:L1003*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage :DC24V
Power:30W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle :30°

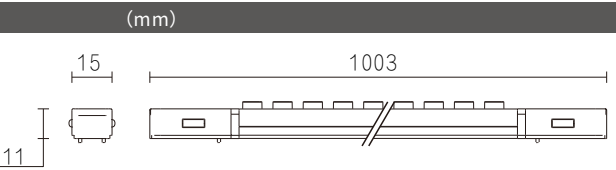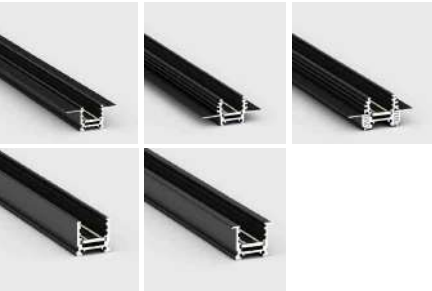


Specification

30°

921.6 lm

h (m)	EO° (lx)	ø (m)
1.50	893.3	3.28
2.25	706.89	4.92
3.50	599.36	7.65
4.00	456.95	8.74

C0/C180: -
C90/C270: -





Adjustable PC linear light





Item no.:KLM-
ZCPM1552/L283/T7W
Size:L283*W15*H52mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:7W
CCT:2700K/3000K/4000K
CRI : ≥ 90
Beam angle:100°



Specification

100°165.6 lm




h(m)	E0°(lx)	ø(m)
1.50	32.95	2.86
2.25	14.65	4.29
3.50	6.05	6.67
4.00	4.63	7.62

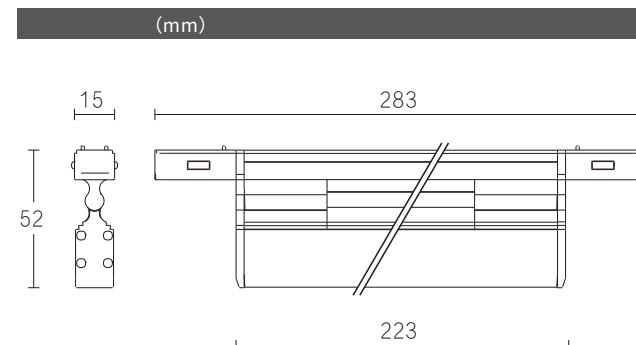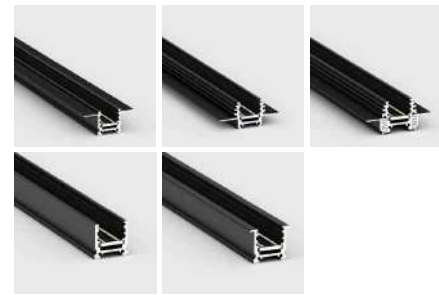






PC linear light

Item no.:KLM-
ZCPM1511/L268/2W
Size:L268*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:2W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:100°

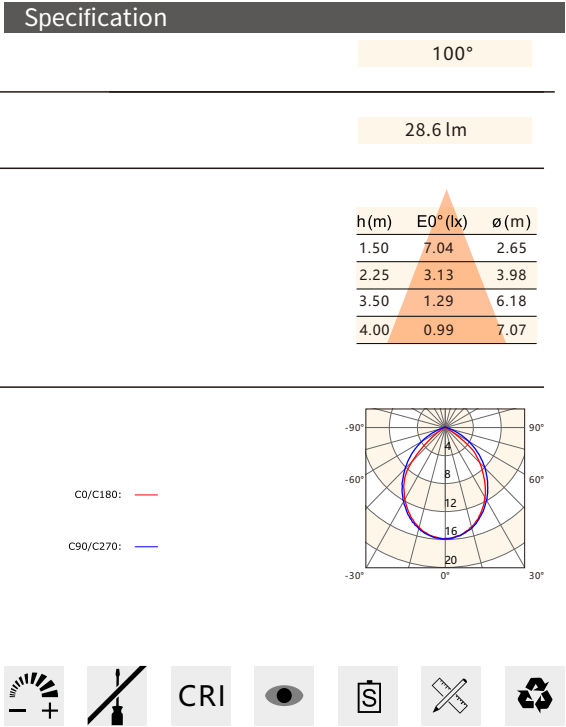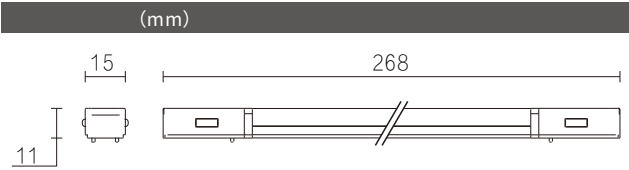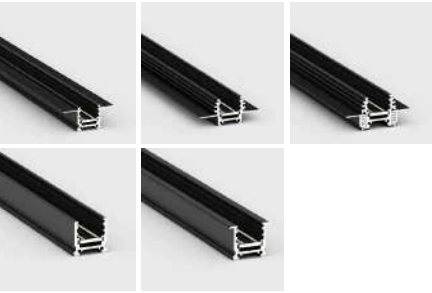

PC linear light




Item no.:KLM-
ZCPM1511/L468/4W
Size:L468*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:4W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:100°

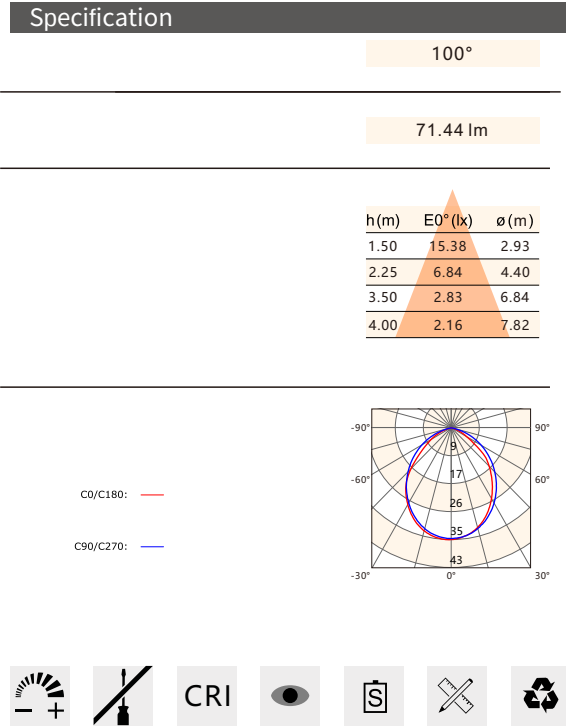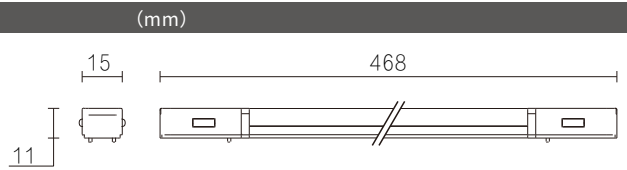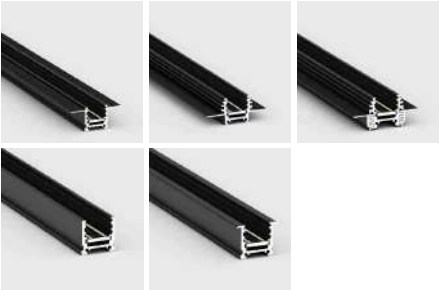






PC linear light

Item no.:KLM-
ZCPM1511/L668/6W
Size:L668*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:6W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:100°

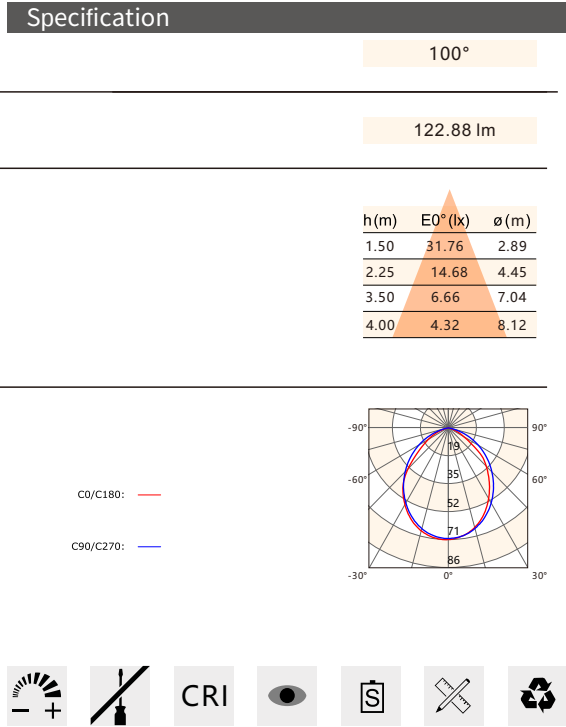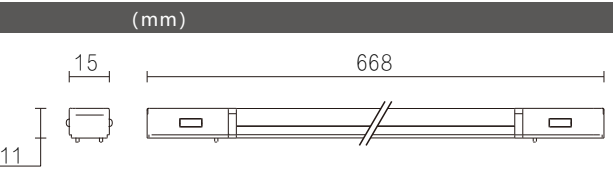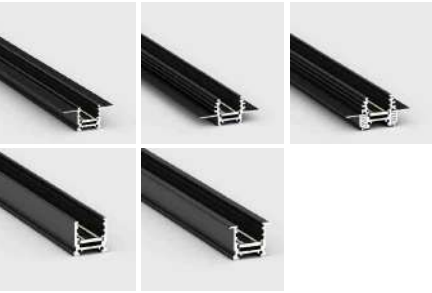

PC linear light



Item no.:KLM-
ZCPM1511/L868/8W
Size:L868*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate :IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:8W
CCT:2700K/3000K/4000K
CRI :≥90
Beam angle:100°

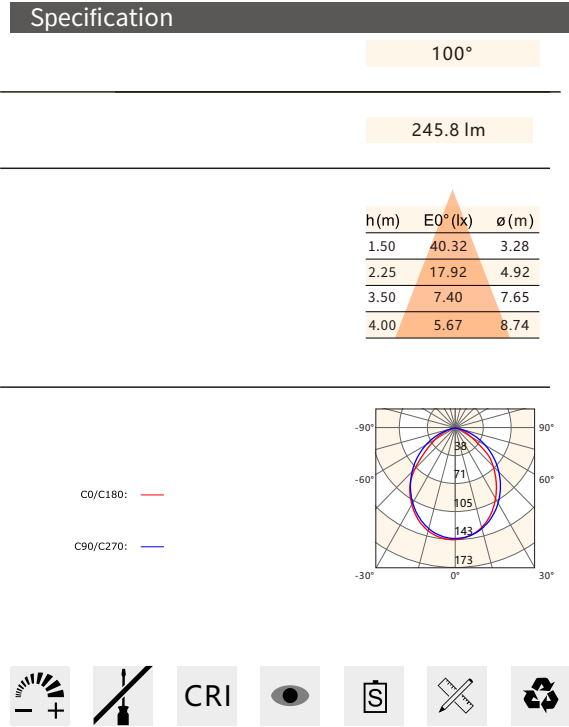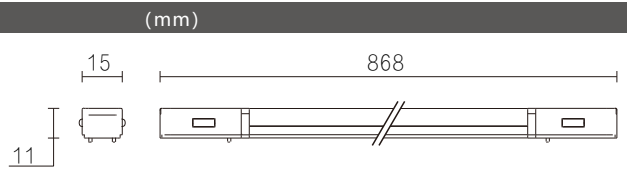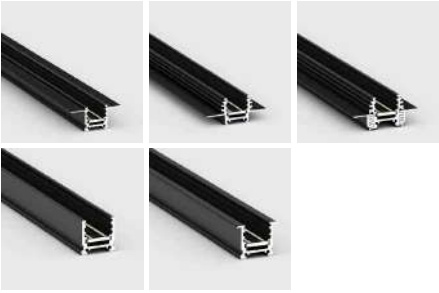



PC linear light

Item no.:KLM-
ZCPM1511/L1068/10W
Size:L1068*W15*H11mm
6063 Aluminium
Color: Sand BK/Sand WH
IP Rate:IP20
Can be DIM
LEDs:Osram
Voltage:DC24V
Power:10W
CCT:2700K/3000K/4000K
CRI : ≥ 90
Beam angle:100°

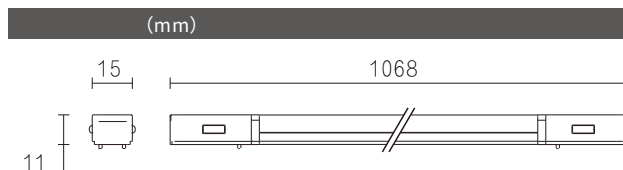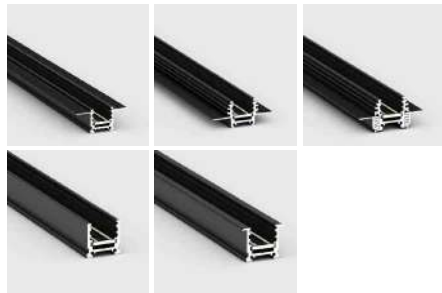


Specification

100°

491.6 lm

h(m)	E0°(lx)	ø(m)
1.50	80.64	3.85
2.25	36.87	4.96
3.50	15.20	7.77
4.00	11.74	8.87




C0/C180: —

C90/C270: —



Application




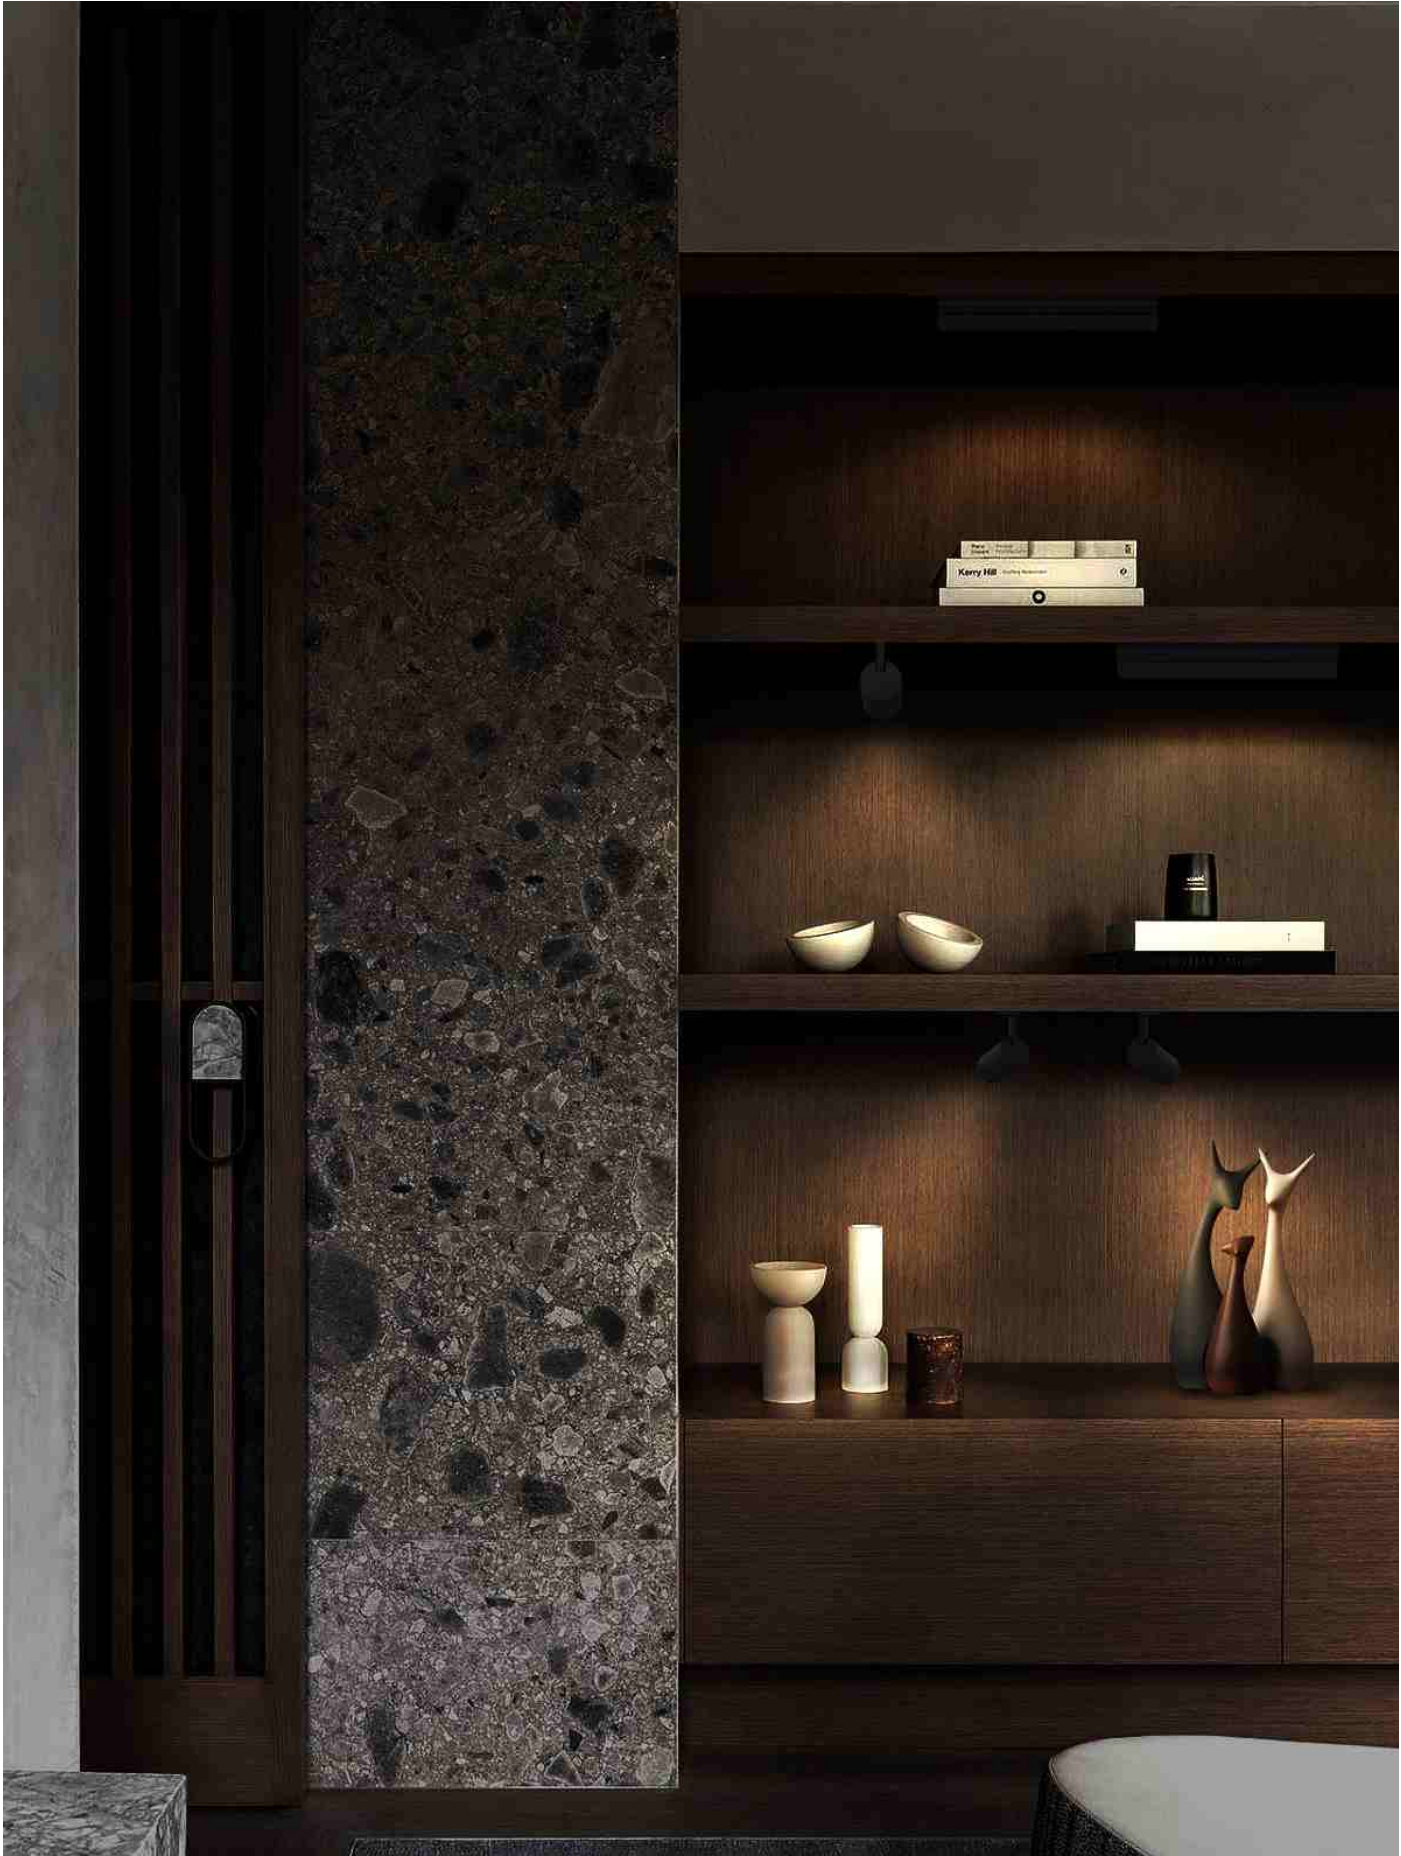






Trimless Recessed

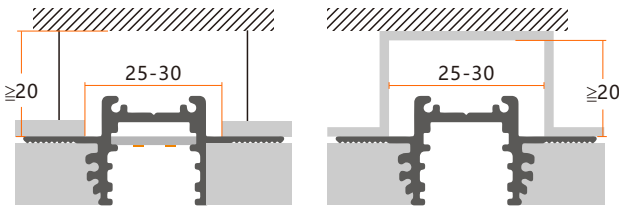


Item no.: KLM-GD4820Y/L1000
Cut hole: W25*H20mm

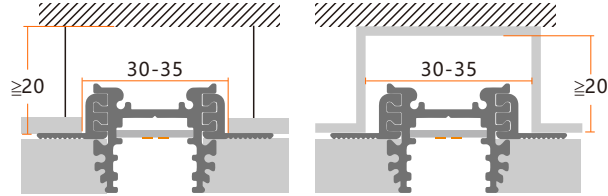


Item no.: KLM-GD4822Y/L1000
Cut hole: W30*H20mm

Surface Recessed

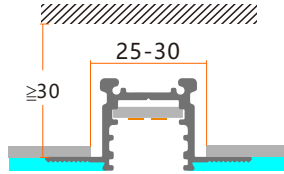

Item no.: KLM-GD4520Q/L1000
Cut hole: W25*H30mm

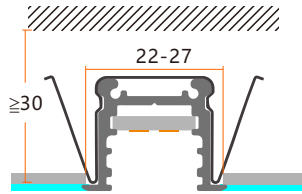

Item no.: KLM-GD2620Q/L1000
Cut hole: W22*H30mm

